

FUSE & CIRCUIT PROTECTION

FUSIBLE ET PROTECTION DE CIRCUIT • PROTECCIÓN DE FUSIBLE Y CIRCUITO

MINI®/ATM BLADE FUSE • MINI^{MD} FUSIBLE À LAMES OU ATM • FUSIBLE DE CUCHILLA MINI®/ATM

MINI®/ATM Blade Fuses

Fast Acting/Blade Mounting

A cost-effective standard automotive fuse for use in automotive, battery and general DC applications.


Body Material: Nylon PA 66

Electrical Specifications: 2A-30A, 32VDC

Design Standards: ISO 8820 Standard Specifications

SPECIFICATIONS

- Voltage: 32VDC
- Amperage: 2A, 3A, 5A, 7.5A, 10A, 15A, 20A, 25A, 30A
- Terminals: Zinc alloy
- Designed to meet SAE and ISO Standards
- Interrupt Rating – 1000A @ 32 VDC



82-ANM-5A



82-ANM-10A



82-ANM-15A



82-2208



82-ANM-20A



82-ANM-25A



82-ANM-30A



82-2213

Part No.	Current Rating	Color	Pack	Description
82-ANM-2A	2A	GRAY	5	MINI® Fuse
82-ANM-3A	3A	VIOLET	5	MINI® Fuse
82-ANM-5A	5A	TAN	5	MINI® Fuse
82-ANM-7.5A	7.5A	BROWN	5	MINI® Fuse
82-ANM-10A	10A	RED	5	MINI® Fuse
82-ANM-15A	15A	BLUE	5	MINI® Fuse
82-ANM-20A	20A	YELLOW	5	MINI® Fuse
82-ANM-25A	25A	CLEAR	5	MINI® Fuse
82-ANM-30A	30A	GREEN	5	MINI® Fuse
82-ANM-7	(5A, 7.5A, 10A, 15A, 20A, 25A, 30A)		7	MINI® Fuse Assortment
82-ANM-8P	(2A, 5A, 7.5A, 10A, 15A, 20A, 25A, 30A)		9	MINI® Fuse Assortment & Puller
82-ANM-8T	(2A, 5A, 7.5A, 10A, 15A, 20A, 25A, 30A)		9	MINI® Fuse Assortment & Tester
82-ASST-43	(5A, 10A, 15A, 20A, 25A, 30A)		43	MINI® Fuse Assortment & Tester
82-ASST-64	(2A, 3A, 4A, 5A, 7.5A, 10A, 15A, 20A, 25A, 30A) + (30A, 40A, 50A)		64	MINI® & MAXI Fuse Assortment & Tester
82-ASST-80M	(3A, 5A, 7.5A, 10A, 15A, 20A, 25A, 30A)		80	MINI®/ATM Fuse Assortment
82-ASST-180			180	Low Profile MINI®, MINI®/ATM, & ATO®/ATC® Fuse Ast.


FUSE HOLDER

82-2208	20A (14GA)	RED	1	MINI® Fuse Holder, 7" with Protective Cap
82-2213	25A Primary Circuit, 15A Auxiliary Circuit (Total not to exceed 30A combined)	RED	1	"Add A Fuse" MINI®/ATM Fuse Holder; 16GA



Warning: Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame. Avoid contact of device with chemical solvent. Prolonged contact will damage the device performance.

MINI®/ATM Blade Fuses with LED Indicator

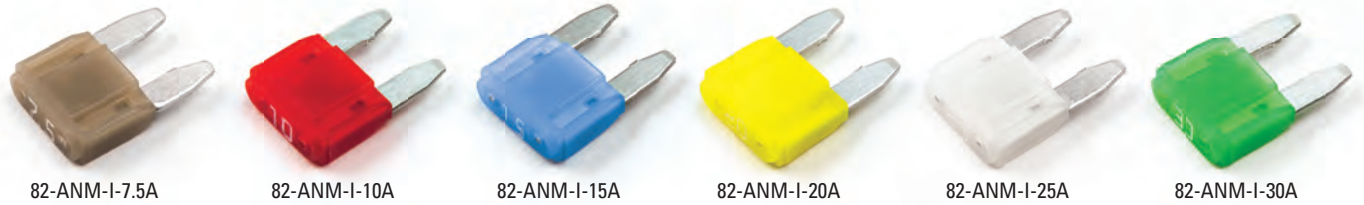

Part No.	Current Rating	Color	Pack	Description
82-ANM-I-3A	3A	VIOLET	2	MINI® Fuse with LED Indicator
82-ANM-I-5A	5A	TAN	2	MINI® Fuse with LED Indicator
82-ANM-I-7.5A	7.5A	BROWN	2	MINI® Fuse with LED Indicator
82-ANM-I-10A	10A	RED	2	MINI® Fuse with LED Indicator
82-ANM-I-15A	15A	BLUE	2	MINI® Fuse with LED Indicator
82-ANM-I-20A	20A	YELLOW	2	MINI® Fuse with LED Indicator
82-ANM-I-25A	25A	CLEAR	2	MINI® Fuse with LED Indicator
82-ANM-I-30A	30A	GREEN	2	MINI® Fuse with LED Indicator
82-ANM-I-5	(10A, 15A, 20A, 25A, 30A)		5	MINI® Fuse with LED Indicator Assortment

Low Profile MINI®/ATM Blade Fuses

Fast Acting/Blade Mounting

Low Profile version of the Miniature Automotive Blade fuse



Body Material: Nylon PA 66

Electrical Specifications: 3A-30A, 32VDC

Design Standards: ISO 8820 Standard Specifications

SPECIFICATIONS

- Voltage: 32V DC
- Amperage: 3A, 5A, 7.5A, 10A, 15A, 20A, 25A, 30A
- Terminals: Zinc alloy
- Designed to meet SAE, ISO Standards
- Interrupt Rating – 1000A @ 32 VDC

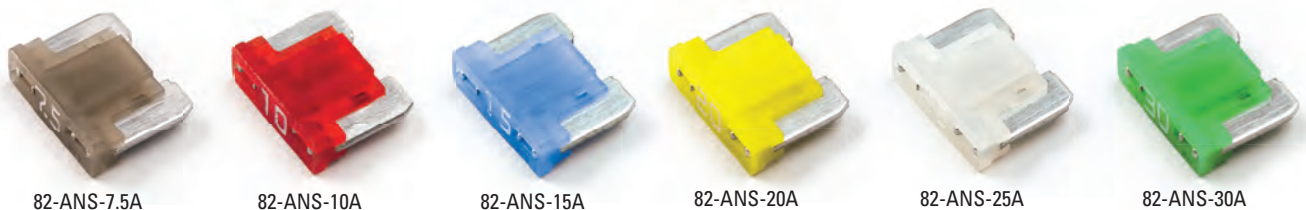

Part No.	Current Rating	Color	Pack	Description
82-ANS-3A	3A	VIOLET	5	Low Profile MINI® Fuse
82-ANS-5A	5A	TAN	5	Low Profile MINI® Fuse
82-ANS-7.5A	7.5A	BROWN	5	Low Profile MINI® Fuse
82-ANS-10A	10A	RED	5	Low Profile MINI® Fuse
82-ANS-15A	15A	BLUE	5	Low Profile MINI® Fuse
82-ANS-20A	20A	YELLOW	5	Low Profile MINI® Fuse
82-ANS-25A	25A	CLEAR	5	Low Profile MINI® Fuse
82-ANS-30A	30A	GREEN	5	Low Profile MINI® Fuse
82-ANS-I-5	(10A, 15A, 20A, 25A, 30A)		5	Low Profile MINI® Fuse LED Assortment
82-ANS-7	(5A, 7.5A, 10A, 15A, 20A, 25A, 30A)		7	Low Profile MINI® Assortment
82-ANS-7P	(5A, 7.5A, 10A, 15A, 20A, 25A, 30A)		8	Low Profile MINI® Assortment & Puller
82-ANS-7T	(5A, 7.5A, 10A, 15A, 20A, 25A, 30A)		8	Low Profile MINI® Assortment & Tester
82-ASST-180			180	Low Profile MINI®, MINI®/ATM, & ATO®/ATC® Fuse Assortment