

WARNING & HAZARD

LED DIRECTIONAL LIGHT

Class I, Class II

Surface Mount

▶▶ NOW AVAILABLE!

FEATURES & BENEFITS

- Ultra low profile; Single and split color models
- 12 different selectable flash patterns in either of two phases, plus steady-on
- Robust design, die cast aluminum base
- Endless mounting possibilities
- Standard four wire hook-up
- S-Link™ System* synchronizing capabilities with up to six other units (for hardware models only). Allows for synchronization with other S-Link compatible products
- Optional chrome or white bezels available
- 5 Year Warranty



VOLTAGE

6 Diode LED: 0.55 Amps @ 12 V

APPROVALS: SAE J595 CLASS I ● AMBER ● BLUE ○ WHITE ● RED

APPROVALS: SAE J595 CLASS II ● AMBER/BLUE ● ○ AMBER/WHITE ● ○ RED/WHITE

NOT SAE APPROVED: ● GREEN ● AMBER/GREEN

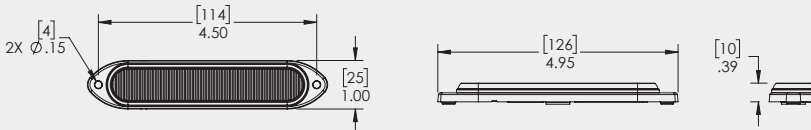

S-Link is a Trademark of Star1889 Headlight & Lantern Co.

PART #	DESCRIPTION	VOLTAGE	COLOR
6 DIODE LED			
78140	6 Diode LED Directional Light, Surface Mount	12 to 24 VDC	● ● Amber/Green
78141	6 Diode LED Directional Light, Surface Mount	12 to 24 VDC	○ White
78142	6 Diode LED Directional Light, Surface Mount	12 to 24 VDC	● Red
78143	6 Diode LED Directional Light, Surface Mount	12 to 24 VDC	● Amber
78144	6 Diode LED Directional Light, Surface Mount	12 to 24 VDC	● Green
78145	6 Diode LED Directional Light, Surface Mount	12 to 24 VDC	● Blue
78146	6 Diode LED Directional Light, Surface Mount	12 to 24 VDC	● ● Amber/Blue
78460	6 Diode LED Directional Light, Surface Mount	12 to 24 VDC	● ○ Amber/White
79080	6 Diode LED Directional Light, Surface Mount	12 to 24 VDC	● ○ Red/White
SERVICE PARTS			
98390	Chrome Bezel for 7814x Models	—	○ Chrome
98400	White Bezel for 7814x Models	—	○ White
98350	License Plate Bracket	—	● Black
98360	L Bracket	—	● Black

**FOR MORE INFORMATION VISIT
OUR WEBSITE AT GROTE.COM**

GROTE'S GOT IT!

***S-LINK TECHNOLOGY:** S-Link System is a proprietary technology that will allow similar S-Link products to be synchronized. This would allow for a user to define the flash patterns on multiple devices for a customized, tailored look on a vehicle. Note: Only S-Link compatible products can be synchronized together. Refer to user installation manuals for details on S-Link Synchronization.



2600 Lanier Drive
Madison, Indiana 47250
Tel: 800.628.0809
Fax: 812.265.8440
www.grote.com