

**WARNING & HAZARD**

# LED DIRECTIONAL LIGHT

## Class I

### Surface Mount



►► NOW AVAILABLE!

**FEATURES & BENEFITS**

- Ultra low profile
- 12 different selectable flash patterns in either of two phases, plus steady-on
- Robust design, die cast aluminum base
- Endless mounting possibilities
- Standard four wire hook-up
- S-Link™ System\* synchronizing capabilities with up to six other units (for hardware models only). Allows for synchronization with other S-Link compatible products
- 5 Year Warranty

**VOLTAGE**

**3 Diode LED:** 0.3 Amps @ 12 V

**79033\*:** 0.6 amps @ 12V

**APPROVALS: SAE J595 CLASS I** ● AMBER ● BLUE ○ WHITE ● RED


**NOT SAE APPROVED:** ● GREEN ● 79033\*



78163



79033

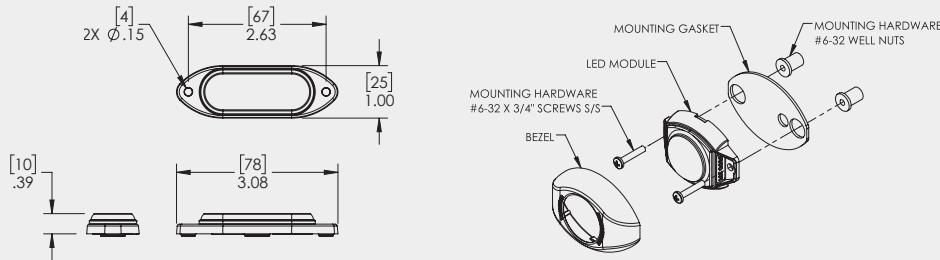

*S-Link is a Trademark of Star1889 Headlight & Lantern Co.*

PART #	DESCRIPTION	VOLTAGE	COLOR
<b>3 DIODE LED</b>			
78161	3 Diode LED Directional Light, Surface Mount	12 VDC	○ White
78162	3 Diode LED Directional Light, Surface Mount	12 VDC	● Red
78163	3 Diode LED Directional Light, Surface Mount	12 VDC	● Amber
78164	3 Diode LED Directional Light, Surface Mount	12 VDC	● Green
78165	3 Diode LED Directional Light, Surface Mount	12 VDC	● Blue
<b>6 DIODE LED (ROUND)</b>			
79033*	6 Diode LED Directional Light, Surface Mount	12 to 24 VDC	● Amber

**FOR MORE INFORMATION VISIT  
OUR WEBSITE AT GROTE.COM**

**GROTE'S GOT IT!**

**\*S-LINK TECHNOLOGY:** S-Link System is a proprietary technology that will allow similar S-Link products to be synchronized. This would allow for a user to define the flash patterns on multiple devices for a customized, tailored look on a vehicle. Note: Only S-Link compatible products can be synchronized together. Refer to user installation manuals for details on S-Link Synchronization.



2600 Lanier Drive  
Madison, Indiana 47250  
Tel: 800.628.0809  
Fax: 812.265.8440  
www.grote.com