

03

AIR PRODUCTS

PRODUITS D'AIR

PRODUCTOS DE AIRE

- 20 Coiled Air
- 22 Gladhands
- 24 Seals and Airline Accessories
- 25 Rubber Air Lines
- 26 Power Cord & Air Assemblies
- 28 Suspension Products
- 30 EZ Claw® Suspension System
- 31 Air Brake Tubing

GROTE CARRIES AN EXTENSIVE LINE OF AIR PRODUCTS REQUIRED FOR OPTIMUM SYSTEM PERFORMANCE.

FROM POWER CORD AND AIR ASSEMBLIES TO SEALS AND SCREENS, OUR AIR PRODUCTS ARE DESIGNED AND MANUFACTURED TO MEET OR EXCEED THE TOUGHEST INDUSTRY STANDARDS.

- Grote's 3-IN-1 Ultralink™ Power Cord and Air Assemblies are proudly made in North America
- Our hoses are designed to withstand harsh conditions including extreme temperatures and harmful chemicals, our "Low Temperature" products are even more rugged
- We offer tightly coiled air tubing assemblies that provide excellent recoil memory, while minimizing sagging or kinking to ensure a long service life
- Grote's exclusive EZ Claw System is the premier automatic suspension system for protecting power cords, airlines, and hydraulic hoses
- We go the extra mile, with heavy gauge steel springs to provide superior cable support, thread sealant added to all brass connectors for a leak-free seals, and high quality 1/2" NPT DOT brass fittings that come standard on all models
- Remember: when it comes to air products, Red = Emergency; Blue = Service



THE GROTE ADVANTAGE

Grote's coiled air hoses are designed to withstand harsh conditions including extreme temperatures and harmful chemicals. The tightly coiled tubing provides excellent recoil memory while minimizing sagging or kinking.



Extremely flexible air tubing has excellent recoil memory even under extreme temperatures



Brass handle for easy coupling and uncoupling



Swivel fittings, extra-long spring and thread sealant provide additional strain relief and ensure an air tight connection

LOW TEMPERATURE COILED AIR



- Low temperature, double-jacketed coils remain flexible in extremely cold temperatures
- Operating temperature of -65°C (-85°F) to 104°C (220°F)
- Nylon Hose meets SAE J844, DOT FMVSS (49 CFR 571.106) & FMCSA (393.45) specifications
- Includes a swivel fitting for the tractor-end connection
- Brass handle enables a solid grip for coupling/uncoupling hoses



PART #	COLOR	WORKING LENGTH	LEADS	PACK
12'				
81-0012-C	Red & Blue	12'	6"	2
81-0012-CGH*	Red & Blue	12'	6"	2
15'				
81-0015-C	Red & Blue	15'	12"	2
81-0015-RC	Red	15'	12"	1
81-0015-BC	Blue	15'	12"	1
81-0015-CGH*	Red & Blue	15'	12"	2
81-0015-40C	Red & Blue	15'	12" & 40"	2
81-0015-40RC	Red	15'	12" & 40"	1
81-0015-40BC	Blue	15'	12" & 40"	1
20'				
81-0020-C	Red & Blue	20'	12"	2
81-0020-RC	Red	20'	12"	1
81-0020-BC	Blue	20'	12"	1

* Includes Red & Blue Gladhands

COILED AIR WITH BRASS HANDLE

- Nylon Hose meets SAE J844, DOT FMVSS (49 CFR 571.106) & FMCSA (393.45) specifications
- Operating temp: -40°C (-40°F) to 104°C (220°F), Brass handle for solid grip (coupling/uncoupling)

PART #	COLOR	WORKING LENGTH	LEADS	PACK
12'				
81-0012-H	Red & Blue	12'	6"	2
81-0012-HR	Red	12'	6"	1
81-0012-HB	Blue	12'	6"	1
15'				
81-0015-H	Red & Blue	15'	12"	2
81-0015-HR	Red	15'	12"	1
81-0015-HB	Blue	15'	12"	1
81-0015-HGH*	Red & Blue	15'	12"	2
81-0015-40H	Red & Blue	15'	12" & 40"	2
81-0015-40HR	Red	15'	12" & 40"	1
81-0015-40HB	Blue	15'	12" & 40"	1
81-0015-40HGH*	Red & Blue	15'	12" & 40"	2



* Includes Red & Blue Gladhands



COILED AIR

- Nylon Hose meets SAE J844, DOT FMVSS (49 CFR 571.106) & FMCSA (393.45) specifications
- Operating temp: -40°C (-40°F) to 104°C (220°F), Swivel fittings on both ends for easy hook-up

PART #	COLOR	WORKING LENGTH	LEADS	PACK
8'				
81-0008	Red & Blue	8'	6"	2
81-0008-R	Red	8'	6"	1
81-0008-B	Blue	8'	6"	1
12'				
81-0012	Red & Blue	12'	6"	2
81-0012-R	Red	12'	6"	1
81-0012-B	Blue	12'	6"	1
81-0012-GH*	Red & Blue	12'	6"	2
15'				
81-0015	Red & Blue	15'	12"	2
81-0015-R	Red	15'	12"	1
81-0015-B	Blue	15'	12"	1
81-0015-GH*	Red & Blue	15'	12"	2
81-0015-40	Red & Blue	15'	12" & 40"	2
81-0015-40R	Red	15'	12" & 40"	1
81-0015-40B	Blue	15'	12" & 40"	1
20'				
81-0020	Red & Blue	20'	12"	2
81-0020-R	Red	20'	12"	1
81-0020-B	Blue	20'	12"	1



* Includes Red & Blue Gladhands



5TH WHEEL SLIDER HOSE

- 54" air hose w/ 1/4" NPT male brass connectors, Nylon 1/4" tubing meets SAE J844 Type A spec
- Includes swivel fittings & heavy duty springs on both ends for easy installation, added strain relief

PART #	DESCRIPTION	PACK
81-0054	54", 5th wheel air hose with dual swivel and springs	1



GLADHANDS

STANDARD & ANGLED



- Meets or exceed SAE J318 standards
- Aluminum castings with powder-coated steel clasp plates (service and emergency)
- Permanent clamp screws; Includes a large face rubber seal
- Polarized emergency and service gladhands
- Replacement seals available in rubber or polyethylene
- Port "A" comes standard as unplugged – 38° gladhands

PART #	MATERIAL	DESCRIPTION	COLOR	SCREEN	PACK
81-0001	Aluminum	Universal	–	No	1
81-0001-S	Aluminum	Universal	–	Yes	1
81-0001-R	Aluminum	Emergency	Red	No	1
81-0001-RS	Aluminum	Emergency	Red	Yes	1
81-0001-B	Aluminum	Service	Blue	No	1
81-0001-BS	Aluminum	Service	Blue	Yes	1
81-0001-38R	Aluminum	38° Emergency	Red	No	1
81-0001-38RS	Aluminum	38° Emergency	Red	Yes	1
81-0001-38B	Aluminum	38° Service	Blue	No	1
81-0001-38BS	Aluminum	38° Service	Blue	Yes	1

OEM-SPEC PREMIUM GLADHANDS

STANDARD & ANGLED



GROTE'S HIGHEST QUALITY, PROFESSIONAL-GRADE GLADHANDS

PROVIDES SUPERIOR PROTECTION FROM CORROSION, BLOCKED AIR LINES AND COSTLY DOWNTIME!

- Available in standard, shutoff, 38° and our new 45° swingers
- All Grote gladhands meet or exceed SAE J1318 standards and are polarized for easy identification (emergency and service)

PART #	MATERIAL	DESCRIPTION	COLOR	SCREEN	PK
81-0011	Aluminum/SS	Universal, Polyseal	Grey	Yes	10
81-0011-B	Aluminum/SS	Service, Polyseal	Blue	Yes	10
81-0011-R	Aluminum/SS	Emergency, Polyseal	Red	Yes	10
81-0011-38B	Aluminum/SS	38° Service, Polyseal	Blue	Yes	10
81-0011-38R	Aluminum/SS	38° Emergency, Polyseal	Red	Yes	10
81-0011-45B	Aluminum/SS	45° Service, Polyseal	Blue	Yes	1
81-0011-45R	Aluminum/SS	45° Emergency, Polyseal	Red	Yes	1
81-0011-SB	Aluminum/SS	Service Shutoff, Polyseal	Blue	Yes	1
81-0011-SR	Aluminum/SS	Emerg. Shutoff, Polyseal	Red	Yes	1

- Cast iron construction for extreme durability
- Polyurethane seals provides a reliable seal and longer service life
- Meets or exceeds J1318 standards

PART #	DESCRIPTION	COLOR	SCREEN	PK
81-0001-C	Universal, Polyseal	Black	No	1
81-0001-CR	Emergency, Polyseal	Red	No	1
81-0001-CB	Service, Polyseal	Blue	No	1
81-0001-CS	Universal, Painted, Polyseal	Black	Yes	1
81-0001-CRS	Emergency, Painted, Polyseal	Red	Yes	1
81-0001-CBS	Service, Painted, Polyseal	Blue	Yes	1
81-0001-90CRS	Emergency, 90° Swinger, S/S Plate, Polyseal	Grey	Yes	1
81-0001-90CBS	Service, 90° Swinger, S/S Plate, Polyseal	Grey	Yes	1

CAST IRON PREMIUM GLADHANDS



HANDLE STYLE – SURFACE MOUNT

- Meets or exceed SAE J318 standards
- Shut-off arm, surface mount
- 3/8" port, full-face rubber seals

PART #	MATERIAL	DESCRIPTION	COLOR	SCREEN	PACK
81-0001-SR	Aluminum	Shut-Off, Emergency	Red	No	1
81-0001-SB	Aluminum	Shut-Off, Service	Blue	No	1

SHUTOFF GLADHANDS



KNOB STYLE – BULKHEAD

- Meets or exceed SAE J318 standards
- Low-profile knob, 3/8" port, full face rubber seal

PART #	MATERIAL	DESCRIPTION	COLOR	SCREEN	PACK
81-0001-SBR	Aluminum	Shut-Off, Emergency	Red	No	1
81-0001-SBB	Aluminum	Shut-Off, Service	Blue	No	1
81-0001-SBRs	Aluminum	Shut-Off, Emergency	Red	Yes	1
81-0001-SBBS	Aluminum	Shut-Off, Service	Blue	Yes	1

SHUTOFF GLADHANDS



- Provides strain relief and prevents kinking of the air coil
- Anodized coating provides superior corrosion resistance
- Allows user to couple/uncouple with ease
- Includes thread sealant on the male end

PART #	MATERIAL	FEATURES	COLOR	PACK
81-0125	Aluminum	Anodized	Red & Blue	2
81-0124	Rubber	Thermo-Elastomeric	Red & Blue	2

GLADHANDLES



GLADHAND ACCESSORIES



PART #	DESCRIPTION	PACK
81-0126	Dummy Gladhand with 18" Stainless Steel Cable	1
81-0126T	Dummy Gladhand with 18" Stainless Steel Cable and Heavy Duty Eyelet	1

GLADHAND LOCK



- Prevents unwanted connection to tractors/trailers
- Made of glass filled nylon; Includes 2 keys – keyed alike

PART #	DESCRIPTION	PACK
81-0149	Gladhand Lock	1

SEALS AND SCREENS




- Seals resist oil, chemicals, ozone
- Improved wear resistance lengthens service life
- Retail and bulk pack options

PART #	MATERIAL	FEATURES	COLOR	PACK
PROTECTIVE DUST FLAP				
81-0103-25	Polyurethane	Protective Dust Flap*	Grey	25
81-0102-100	Rubber	Protective Dust Flap*	Black	100
81-0102-08	Rubber	Protective Dust Flap*	Black	8
LARGE FACE WITH BUILT-IN FILTER SCREEN				
81-0113-100R	Polyurethane	w/ Built-In Filter Screen	Red	100
81-0113-08R	Polyurethane	w/ Built-In Filter Screen	Red	8
81-0113-100B	Polyurethane	w/ Built-In Filter Screen	Blue	100
81-0113-08B	Polyurethane	w/ Built-In Filter Screen	Blue	8
LARGE FACE				
81-0110-100R	Polyurethane	Large Face	Red	100
81-0110-08R	Polyurethane	Large Face	Red	8
81-0110-100B	Polyurethane	Large Face	Blue	100
81-0110-08B	Polyurethane	Large Face	Blue	8
81-0111	Polyurethane	Large Face	2 Red/2 Blue	4
81-0116-100BP	Polyurethane	Large Face	Black	100
81-0116-08BP	Polyurethane	Large Face	Black	8
SMALL FACE				
81-0112-100R	Polyurethane	Small Face	Red	100
81-0112-100B	Polyurethane	Small Face	Blue	100
81-0117-100BP	Polyurethane	Small Face	Black	100
DOUBLE LIP				
81-0101-100	Rubber	Double Lip	Black	100
81-0101-08	Rubber	Double Lip	Black	8
SINGLE LIP				
81-0100-100	Rubber	Single Lip	Black	100
FILTER SCREEN				
81-0115-25	Stainless Steel	Filter Screen	–	25

* Recommend to use a filter screen at all times

RUBBER AIR LINES



- 3/8" SAE J1402 Type A, EPDM rubber hose; UV and ozone resistant
- Meets or exceeds all DOT FMVSS No. 106 – Brake Hoses, 49 CFR 571.106
- Designed for operating pressure up to 225 psi; Minimum burst pressure = 900 psi
- Includes a swivel fitting for the tractor-end connection
- Rugged elastomeric hose is resistant to gasoline, diesel fuel, oil, and other chemicals
- O.D. 3/4" (3/8" Hose); O.D. 7/8" (1/2" Hose)
- Available in Black, Red, Blue for easy identification of emergency and service lines
- Aluminum grips provide easy coupling/uncoupling
- Bulk rubber hose and spring guard available to make custom hoses
- Red and Blue bulk hose available upon request

PART #	HOSE COLOR	GRIP COLOR	WORKING LENGTH	PACK
12'				
81-0112-R	Red	–	12'	1
81-0112-B	Blue	–	12'	1
81-0112-RGR	Red	Red	12'	1
81-0112-BGB	Blue	Blue	12'	1
81-0112	Black	–	12'	1
81-0112-GRB	Black	Red & Blue	12'	2
81-0112-GR	Black	Red	12'	1
81-0112-GB	Black	Blue	12'	1
81-0112-SS	Black	Black w/Single Spring	12'	1
81-0112-RSS	Red	Red w/Single Spring	12'	1
81-0112-BSS	Blue	Blue w/Single Spring	12'	1
15'				
81-0115-R	Red	–	15'	1
81-0115-B	Blue	–	15'	1
81-0115-RGR	Red	Red	15'	1
81-0115-BGB	Blue	Blue	15'	1
81-0115	Black	–	15'	1
81-0115-GRB	Black	Red & Blue	15'	2
81-0115-GR	Black	Red	15'	1
81-0115-GB	Black	Blue	15'	1
81-0115-SS	Black	Black w/Single Spring	15'	1
81-0115-RSS	Red	Red w/Single Spring	15'	1
81-0115-BSS	Blue	Blue w/Single Spring	15'	1
20'				
81-0120	Black	–	20'	1
81-0120-GRB	Black	Red & Blue	20'	2
81-0120-GR	Black	Red	20'	1
81-0120-GB	Black	Blue	20'	1



81-0112-RGR



81-0112-BGB



81-0115



81-0115-GRB

BULK RUBBER AIR HOSE, SPRING GUARD

- -40°C (-40°F) to 93°C (200°F)

PART #	NOMINAL INSIDE DIA	NOMINAL OUTSIDE DIA	WORKING PRESSURE	MIN BEND RADIUS	WEIGHT (LB/FT)	LENGTH
81-0038-250	.375"	.75"	Min. Burst 900	2.25"	0.17	250'
81-0012-250	.5"	.88"	Min. Burst 900	3.00"	0.20	250'

PART #	DESCRIPTION	PACK
81-0115-SPR	3/8" x 1/2" Reusable or Field Attachable Fitting w/Spring Guard	2



81-0038-250



81-0115-SPR

ULTRALINK™ POWER CORD & AIR ASSEMBLIES


Connect and Protect your trailer and equipment with Grote's 3-in-1 and 4-in-1 **UltraLink™ Power Cord & Air Assemblies** featuring rugged straight rubber air line hoses and Grote's crush-resistant **UltraLink™ Power Cords**. The 4-in-1 **UltraLink™** also features high-performance auxiliary power cables.

CRUSH RESISTANT



UltraLink's crush-resistant design can survive being run over by a heavy duty vehicle while conventional hollow core designs are permanently deformed and rendered useless.

PLUG DESIGN

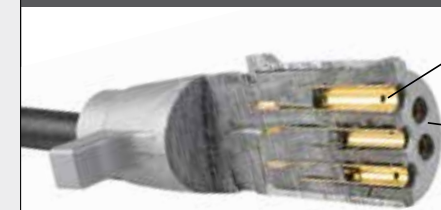

Solid brass, nickel-plated pins
Crush-resistant, weather-tight elastomeric material

The **UltraLink™ Power Cord** is the backbone of Grote's 3-in-1 and 4-in-1 systems! This premium power cord is constructed utilizing Grote's crush-resistant plug, so frequent replacement of the plug is no longer a consideration. Our plug stands up to the harshest environments and provides maximum reliability, while delivering improved performance, longer wear, and superior conductivity.

3-IN-1

ULTRALINK™ POWER CORD & AIR ASSEMBLIES



- Our rubber air lines are resistant to gasoline, diesel fuel, oil, and other chemicals
- The tractor ends of the hoses include swivel fittings, providing easy and quick installation
- Premium high-strength spiral wrap protects the cable and air lines from chaffing and kinking
- Assemblies with easy-coupling rubber gladhandles include a premium EZ Claw® "Self-Adjusting Sling"

POWER CORD SPECIFICATIONS

Plug: SAE J560
Cable: J2394 (ABS)
Cord: 1/8 GA, 2/10 GA, 4/12 GA
Operating Range: -55°F to 190°F / -48°C to 87°C

AIR LINE SPECIFICATIONS

DOT FMVSS-106
SAE J1402

PART #	HOSE COLOR	WORKING LENGTH	GRIPS	PACK
Black Air Lines				
81-3112	Black	12'	Anodized	1
81-3112-GRP	Black	12'	Rubber	1
81-3115	Black	15'	Anodized	1
81-3115-GRP	Black	15'	Rubber	1
81-3120	Black	20'	Anodized	1
Red & Blue Air Lines				
81-3212	Red & Blue	12'	Anodized	1
81-3212-GRP	Red & Blue	12'	Rubber	1
81-3215	Red & Blue	15'	Anodized	1
81-3215-GRP	Red & Blue	15'	Rubber	1
81-3215N	Red & Blue	15'	No Grips	1



ULTRALINK™ POWER CORD & AIR ASSEMBLIES

4-IN-1



- Our rubber air lines are resistant to gasoline, diesel fuel, oil, and other chemicals
- The tractor ends of the hoses, include swivel fittings, providing easy and quick installation
- Premium high-strength spiral wrap protects the cable and air lines from chaffing and kinking
- All assemblies come with easy-coupling gladhandles and a premium EZ Claw® "Self-Adjusting Sling"

POWER CORD SPECIFICATIONS

Plug: SAE J560
Cable: J2394 (ABS)
Cord: 1/8 GA, 2/10 GA, 4/12 GA
Operating Range: -55°F to 190°F / -48°C to 87°C

AIR LINE SPECIFICATIONS

DOT FMVSS-106
SAE J1402

PART #	STYLE/HOSE COLOR	WORKING LENGTH	GRIPS	PACK
Single Pole				
81-3312	Single Pole, Black	12'	Anodized	1
81-3312-GRP	Single Pole, Black	12'	Rubber	1
81-3315	Single Pole, Black	15'	Anodized	1
81-3315-GRP	Single Pole, Black	15'	Rubber	1
Dual Pole				
81-3412	Dual Pole, Black	12'	Anodized	1
81-3412-GRP	Dual Pole, Black	12'	Rubber	1
81-3415	Dual Pole, Black	15'	Anodized	1
81-3415-GRP	Dual Pole, Black	15'	Rubber	1
ISO Auxiliary				
81-3512	ISO Auxiliary, Black	12'	Anodized	1
81-3512-GRP	ISO Auxiliary, Black	12'	Rubber	1
81-3515	ISO Auxiliary, Black	15'	Anodized	1
81-3515-GRP	ISO Auxiliary, Black	15'	Rubber	1




TRACKER BAR SPRING REPLACEMENT KIT



- Complete replacement kit in one convenient part
- Includes a heavy duty spring and cover; 3 hose holder and large tracker bar snap clip

PART #	DESCRIPTION	LENGTH	PACK SIZE
81-0135	Single Spring	16"	1
81-0147	Single Spring w 81-0129	20"	1
81-0145	Dual Spring	16"	1
81-0146	Dual Spring	25"	1

HOSE HOLDERS

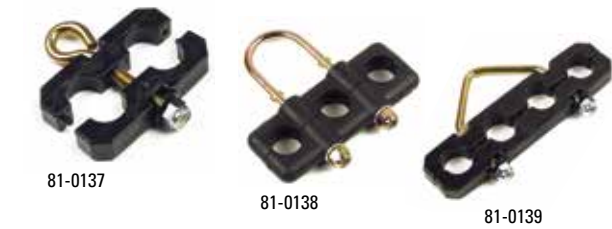

- Designed to route and suspend air coils, hoses and electrical cables
- Provides excellent kink protection

PART #	DESCRIPTION	PACK SIZE
81-0137	2 Hose holder – 3/4" x 2, Eyelet Bolt	1
81-0138	3 Hose holder – 3/4" x 3, U-Bolt	1
81-0139	4 Hose holder – 3/4" x 4, Adjustable Bolt	1

CABLE CLAMP HOLDER



- Cable clamp & clip designed to support power cords and rubber air lines, including 3 in 1 assemblies
- Includes a heavy duty rubber insulated clamp and steel snap clip

PART #	DESCRIPTION	PACK SIZE
81-0129	Cable Clamp Holder	1

SNAP CLIP



- Stainless steel construction
- Ideal for use with a tracker bar

PART #	DESCRIPTION	PACK SIZE
81-0140	Snap Clip – Large	1

POGO STICKS



- Designed for nylon, rubber air hoses and heavy-duty ABS cables
- Internal heavy duty spring
- Includes a 7/16" mounting bolt, 3 hose holder, eyebolt & nut

PART #	MATERIAL	LENGTH	PACK SIZE
81-0130	Chrome	40"	1
81-0131	Zinc dichromate	40"	1

TENDER SPRINGS

- Heavy duty springs provide superior support
- Designed for under trailer applications
- Double loop ends

PART #	DESCRIPTION	PACK SIZE
81-0136	24", Includes 2 hose holder	1



SUSPENDER SPRINGS

- Heavy duty springs provide superior support
- Outside diameter exceeds 1"
- Double loop ends

PART #	DESCRIPTION	PACK SIZE
81-0132	12", Tandem and airline support	1
81-0133	14 1/2", Straight cable assemblies	1
81-0134	25", HD application incl. ABS power cords	1



HOSE HANGER CLAMPS

- Quality material designed for low temperatures
- Ultra Violet (U.V.) and impact resistant

PART #	DESCRIPTION	PACK SIZE
83-7015	2 Hose holder – 3/8" x 2	25
83-7016	2 Hose holder – 1/2" x 2	25
83-7017	2 Hose holder – 3/8" and 1/2"	25



DRAIN VALVES

- 200 PSI maximum working pressure

PART #	FEATURES	PACK SIZE
81-0128	Drain Valve, 60" Stainless Steel Cable; 1/4" NPTF Male Thread	1
81-0128-14	Drain Valve with Uncrimped Loop (Ready-to-Install), 60" Stainless Steel Cable; 1/4" NPTF Male Thread	1



EZ CLAW®



EVERY EZ CLAW® PRODUCT IS RUGGED, LIGHTWEIGHT, AND BUILT TO LAST

The EZ Claw System is the premier automatic suspension system for protecting power cords, airlines, and hydraulic hoses.

Easy to install, the system is designed to prevent chaffing, crimping, and unplanned disconnects for the life of your truck.

Connect and protect your power cords and hoses with ease, while preventing the costly maintenance and downtime that can come with unreliable tracker bars and springs.



81-2300

EZ CLAW TENSIONER



81-2301

81-2302VM

EZ CLAW MOUNTING BRACKETS



81-2306

EZ CLAW SLUNG



81-2303

EZ CLAW HOSE & CABLE BLOCK

Travel Length: Up to 84"

Travel Range: Full 90°

Support Strength: 25, 30 & 40 lbs

Corrosion Rating: ASTM F1941 & B117

Bracket Cut: Laser (Accurate to 0.001")

Bracket Welding: Robotic (Accurate to 0.041")

Bracket Plating: Zinc (ASTM B633)

Bracket Painting: Powder-coated

Sling Strength: 500 lb Rating

Sling Resistance: Moisture, Chemicals and UV

Sling Material: Polyester & Stainless Steel

Cable Block Material: Polymer & Stainless Steel

BUILDING YOUR EZ CLAW SYSTEM IS AS EZ AS 1-2-3!

1. CHOOSE YOUR EZ CLAW TENSIONER

PART #	DESCRIPTION	SUPPORTS AND PROTECTS	WEIGHT
81-2300	EZ Claw Tensioner, 25 LB	12'-15' 3-in-1's & Straight Cords and Hoses	5 lbs
81-2309	EZ Claw Tensioner, 30 LB	12'-15' 4-in-1's & Straight Cords and Hoses, 20' 3-in-1's	5 lbs
81-2305	EZ Claw Tensioner, 40 LB	Hydraulic Lines	5.4 lbs

2. CHOOSE YOUR EZ CLAW MOUNTING BRACKET

PART #	DESCRIPTION	IDEAL APPLICATION	TRUCK TYPE	MOUNT SIZE
81-2301	EZ Claw Flange Mount Bracket	Back of Cab / Headache Rack	Sleeper	8" x 8.25"
81-2302VM	EZ Claw Versa Mount Bracket	Back of Cab / Headache Rack	Day Cab	5" x 8.25"
81-2304	EZ Claw Top Mount Bracket	Tool Box or Top of Headache Mount	any w/ Rack or Box	5" x 8.25"

HAVE A FREIGHTLINER M2?

PART #	DESCRIPTION	SPECIFIC APPLICATION
81-2308	EZ Claw Freightliner M2 Adapter Bracket	Rear Cab Installations on M2 Cabs w/o Air Fairing


WHICH BRACKET IS RIGHT FOR YOU?

PART #	MAKE	MODEL	SLEEPER	DAY CAB	PART #	MAKE	MODEL	SLEEPER	DAY CAB
81-2301	FREIGHTLINER	COLUMBIA	✓	✓	81-2302VM	MACK	ALL	✓	✓
	FREIGHTLINER	CASCADIA	✓			VOLVO	ALL	✓	✓
	INTERNATIONAL	ALL	✓			FREIGHTLINER	CASCADIA	✓	✓
	PETERBILT	ALL	✓	✓		INTERNATIONAL	ALL	✓	✓
	KENWORTH	ALL	✓	✓					

3. CHOOSE YOUR EZ CLAW HOLDER

PART #	DESCRIPTION	IDEAL APPLICATION	SUPPORT DIAMETER	MATERIAL
81-2306	EZ Claw Sling	3-in-1's, 4-in-1's, Hydraulic Lines	Up to 2" bundle or hose	UV-Protected Polyester
81-2303	EZ Claw Hose & Cable Block	Straight Cords and Hoses	3 x 3/8" (cord or hose)	Polymer + Stainless Steel

AIR BRAKE TUBING – BULK



- UV and ozone resistant nylon material; available in multiple lengths & colors
- Resistant to gasoline, diesel fuel and other road chemicals
- Meets or exceeds SAE J844 (Type A – non-reinforced & Type B – reinforced)
- Meets or exceeds SAE J844, DOT FMVSS (49 CFR 571.106) & FMCSA (393.45)
- Meets or exceeds DOT requirements for use with compression fittings
- Operates at up to 150 psi in air brake systems; Operating range: -40°F to 200°F

PART #	OUTSIDE DIAMETER	COLOR	TYPE	LENGTH
1/8"				
81-1018-100B	1/8"	Black	A	100'
5/32"				
81-1532-100B	5/32"	Black	A	100'
81-1532-500B	5/32"	Black	A	500'
1/4"				
81-1014-1000B	1/4"	Black	A	1000'
81-1014-100B	1/4"	Black	A	100'
81-1014-1000BL	1/4"	Blue	A	1000'
81-1014-100BL	1/4"	Blue	A	100'
81-1014-1000G	1/4"	Green	A	1000'
81-1014-100G	1/4"	Green	A	100'
81-1014-1000R	1/4"	Red	A	1000'
81-1014-100R	1/4"	Red	A	100'
81-1014-100Y	1/4"	Yellow	A	100'
5/16"				
81-1516-100B	5/16"	Black	A	100'
3/8"				
81-1038-500B	3/8"	Black	B	500'
81-1038-100B	3/8"	Black	B	100'
81-1038-500BL	3/8"	Blue	B	500'
81-1038-100BL	3/8"	Blue	B	100'
81-1038-500G	3/8"	Green	B	500'
81-1038-100G	3/8"	Green	B	100'
81-1038-500R	3/8"	Red	B	500'
81-1038-100R	3/8"	Red	B	100'
81-1038-500Y	3/8"	Yellow	B	500'
81-1038-100Y	3/8"	Yellow	B	100'
1/2"				
81-1012-500B	1/2"	Black	B	500'
81-1012-100B	1/2"	Black	B	100'
81-1012-500BL	1/2"	Blue	B	500'
81-1012-100BL	1/2"	Blue	B	100'
81-1012-500G	1/2"	Green	B	500'
81-1012-100G	1/2"	Green	B	100'
81-1012-500R	1/2"	Red	B	500'
81-1012-100R	1/2"	Red	B	100'
81-1012-500Y	1/2"	Yellow	B	500'
81-1012-100Y	1/2"	Yellow	B	100'
5/8"				
81-1058-250B	5/8"	Black	B	250'
3/4"				
81-1034-250B	3/4"	Black	B	250'



81-1014-100B



81-1038-100BL



81-1012-500R