



79353-5

MINI MAGNETIC BEACON

USER GUIDE

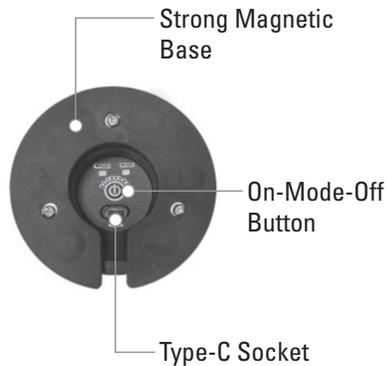

BOTTOM INDICATOR LIGHTS

Charge Indicator Red: Battery is charging
Green: Battery is fully charged

Battery Indicator Steady On: Full Power
Double Flash: Battery is below 50%
Quick Flash: Low Battery (Charge ASAP)

⚠ WARNING

- (1) Be sure fully tighten the lens in correct position before install to avoid water ingress.
- (2) The fully-charged lithium battery still retains 90% of its nominal capacity after at least 18 months of installation.
- (3) It is recommended to recharge the product after each use to ensure battery longevity and capacity; charge it within every 3 months if it is not used for a long time.
- (4) Grote cannot guarantee the ability of the light to remain in place on a moving vehicle. It is the sole responsibility of the owner to ensure the warning light is secure.

SPECIFICATIONS

| | |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating Voltage | 5V DC |
| Power | 8 LED *5W |
| Battery Type | 1 PC of polymer lithium-ion battery <i>This battery has a protective plate to prevent the battery from exploding and spontaneous combustion.</i> |
| Approx. Charge Time | 2 hours |
| Discharging Times | 1. Rotation (SAE Class2): Approx. 4.5H 2. SOS: Approx. 5H 3. Steady On: Approx. 4H 4. High Intensity Rotating Flash (SAE Class1): Approx 1.5H <i>Note: Press and hold the ON-MODE-OFF button for 3 seconds, it will change to high intensity rotating flash; press again back to the previous pattern.</i> |

| | |
|------------------------------|----------------------------------------------------------------|
| Certification | Approval: CE, UKCA Meets SAE J845 Class 1, SAE J845 Class 2 |
| IP rating | IP65 |
| Flash Patterns | 4 |
| Color | Amber |
| Lens Material | Polycarbonate |
| Cover Material | ABS |
| Housing Material | Aluminum Alloy |
| Mounting | Magnetic |
| Operating Temperature | -20°C to +50°C |
| Package includes | Type-C/USB-A Charging Cable (1 Meter) |