

WARNING & HAZARD

TRI-COLOURED LED DIRECTIONAL LIGHT Class I

Surface Mount

►► NOW AVAILABLE!

FEATURES & BENEFITS


- 18 different selectable flash patterns in either of two phases
- 3 independent power wires give you the ability to control each color and pattern independently
- Ultra-low-profile can be mounted to almost any flat surface
- S-Link™ system synchronizing capabilities allows for synchronization with other S-Link™ compatible products
- Built in ambient light sensor for optional Auto dim
- 6 LED's per color for a total of 18 super bright LED's
- VMRS Code: 034-001-021

VOLTAGE: 12–24V

Amp Draw: 0.8A at 12V

APPROVALS: SAE J595 CLASS I ● AMBER ● BLUE ○ WHITE ● RED

NOT SAE APPROVED: ● GREEN (79110)

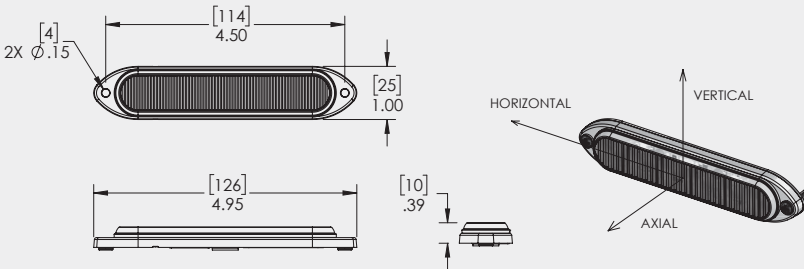

79100



98390



98400



98360



98350

S-Link is a Trademark of Star1889 Headlight & Lantern Co.

PART #	DESCRIPTION	VOLTAGE	COLOR
6 DIODE LED			
79100	6 Diode LED Directional Light, Surface Mount	12 to 24 VDC	●●○ Amber/Blue/White
79110	6 Diode LED Directional Light, Surface Mount	12 to 24 VDC	●●○ Amber/Green/White
79120	6 Diode LED Directional Light, Surface Mount	12 to 24 VDC	●●○ Amber/Red/White
SERVICE PARTS			
98350	License Plate Bracket	—	● Black
98360	L Bracket	—	● Black
98390	Chrome Bezel for 7814x Models	—	○ Chrome
98400	White Bezel for 7814x Models	—	○ White

**FOR MORE INFORMATION VISIT
OUR WEBSITE AT GROTE.COM
GROTE'S GOT IT!**

***S-LINK TECHNOLOGY:** S-Link System is a proprietary technology that will allow similar S-Link products to be synchronized. This would allow for a user to define the flash patterns on multiple devices for a customized, tailored look on a vehicle. Note: Only S-Link compatible products can be synchronized together. Refer to user installation manuals for details on S-Link Synchronization.



230 Travail Rd, Markham,
Ontario, Canada L3S 3J1
Tel: 800.268.5612
US: 800.628.0809
www.grote.com

CONNECT & PROTECT