

WARNING & HAZARD

LED DIRECTIONAL LIGHT

Class I, Class II

Surface Mount

►► NOW AVAILABLE!

FEATURES & BENEFITS

- Ultra low profile; Single and split color models
- 12 different selectable flash patterns in either of two phases, plus steady-on
- Robust design, die cast aluminum base
- Endless mounting possibilities
- Standard four wire hook-up
- S-Link™ System* synchronizing capabilities with up to six other units (for hardware models only). Allows for synchronization with other S-Link compatible products
- Optional chrome or white bezels available
- 5 Year Warranty

VOLTAGE



6 Diode LED: 0.55 Amps @ 12 V **3 Diode LED:** 0.3 Amps @ 12 V

Amp Draw (79033 only): 0.6 amps @ 12V

APPROVALS: SAE J595 CLASS I ● AMBER ● BLUE ○ WHITE ● RED

APPROVALS: SAE J595 CLASS II ●● AMBER/BLUE ●○ AMBER/WHITE ●○ RED/WHITE

NOT SAE APPROVED: 79033* ●● AMBER/GREEN ● GREEN

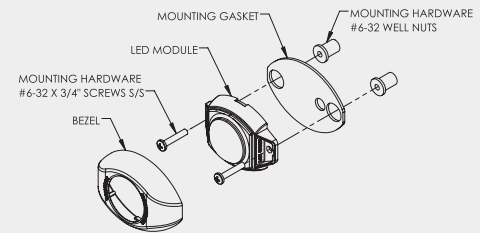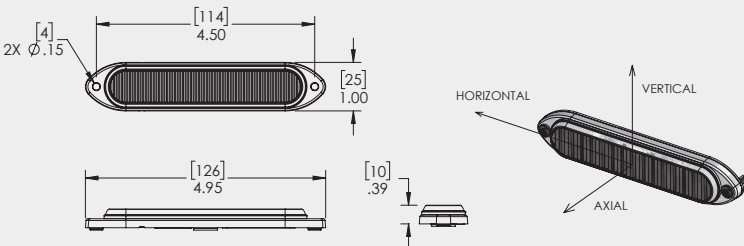

S-Link is a Trademark of Star1889 Headlight & Lantern Co.

PART #	DESCRIPTION	VOLTAGE	COLOR
6 DIODE LED			
78140	6 Diode LED Directional Light, Surface Mount	12 to 24 VDC	●● Amber/Green
78141	6 Diode LED Directional Light, Surface Mount	12 to 24 VDC	○ White
78142	6 Diode LED Directional Light, Surface Mount	12 to 24 VDC	● Red
78143	6 Diode LED Directional Light, Surface Mount	12 to 24 VDC	● Amber
78144	6 Diode LED Directional Light, Surface Mount	12 to 24 VDC	● Green
78145	6 Diode LED Directional Light, Surface Mount	12 to 24 VDC	● Blue
78146	6 Diode LED Directional Light, Surface Mount	12 to 24 VDC	●● Amber/Blue
78460	6 Diode LED Directional Light, Surface Mount	12 to 24 VDC	●○ Amber/White
79080	6 Diode LED Directional Light, Surface Mount	12 to 24 VDC	●○ Red/White
79033*	6 Diode LED Directional Light, Surface Mount	12 to 24 VDC	● Amber

**FOR MORE INFORMATION VISIT
OUR WEBSITE AT GROTE.COM**

GROTE'S GOT IT!

***S-LINK TECHNOLOGY:** S-Link System is a proprietary technology that will allow similar S-Link products to be synchronized. This would allow for a user to define the flash patterns on multiple devices for a customized, tailored look on a vehicle. Note: Only S-Link compatible products can be synchronized together. Refer to user installation manuals for details on S-Link Synchronization.



230 Travail Rd, Markham,
Ontario, Canada L3S 3J1
Tel: 800.268.5612
US: 800.628.0809
www.grote.com

WARNING & HAZARD

LED DIRECTIONAL LIGHT

Class I, Class II

Surface Mount

►► NOW AVAILABLE!

FEATURES & BENEFITS

- Ultra low profile; Single and split color models
- 12 different selectable flash patterns in either of two phases, plus steady-on
- Robust design, die cast aluminum base
- Endless mounting possibilities
- Standard four wire hook-up
- S-Link™ System* synchronizing capabilities with up to six other units (for hardware models only). Allows for synchronization with other S-Link compatible products
- Optional chrome or white bezels available
- 5 Year Warranty

VOLTAGE

6 Diode LED: 0.55 Amps @ 12 V **3 Diode LED:** 0.3 Amps @ 12 V

Amp Draw (79033 only): 0.6 amps @ 12V


APPROVALS: SAE J595 CLASS I ● AMBER ● BLUE ○ WHITE ● RED

APPROVALS: SAE J595 CLASS II ● AMBER/BLUE ● AMBER/WHITE ● RED/WHITE


NOT SAE APPROVED: 79033* ● AMBER/GREEN ● GREEN



78164

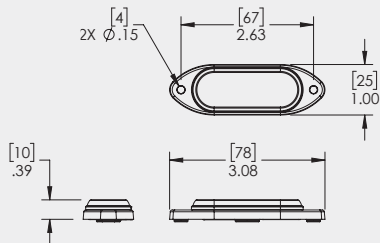

98390



98400



98360



98350

S-Link is a Trademark of Star1889 Headlight & Lantern Co.

PART #	DESCRIPTION	VOLTAGE	COLOR
3 DIODE LED			
78161	3 Diode LED Directional Light, Surface Mount	12 VDC	○ White
78162	3 Diode LED Directional Light, Surface Mount	12 VDC	● Red
78163	3 Diode LED Directional Light, Surface Mount	12 VDC	● Amber
78164	3 Diode LED Directional Light, Surface Mount	12 VDC	● Green
78165	3 Diode LED Directional Light, Surface Mount	12 VDC	● Blue
SERVICE PARTS			
98350	License Plate Bracket	—	● Black
98360	L Bracket	—	● Black
98390	Chrome Bezel for 7814x Models	—	○ Chrome
98400	White Bezel for 7814x Models	—	○ White

**FOR MORE INFORMATION VISIT
OUR WEBSITE AT GROTE.COM**

GROTE'S GOT IT!

***S-LINK TECHNOLOGY:** S-Link System is a proprietary technology that will allow similar S-Link products to be synchronized. This would allow for a user to define the flash patterns on multiple devices for a customized, tailored look on a vehicle. Note: Only S-Link compatible products can be synchronized together. Refer to user installation manuals for details on S-Link Synchronization.



230 Travail Rd, Markham,
Ontario, Canada L3S 3J1
Tel: 800.268.5612
US: 800.628.0809
www.grote.com