LUMIÈRES D'INTÉRIEUR | LÁMPARAS PARA INTERIOR

Grote

# 05

# INTERIOR LIGHTING

LUMIÈRES D'INTÉRIEUR


LÁMPARAS PARA INTERIOR



## LED WHITELIGHT RECESSED-MOUNT 18" DOME LAMP



05

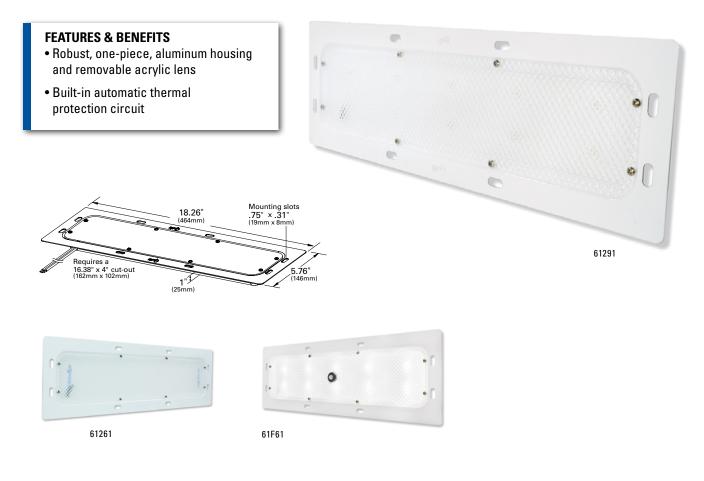

| Part<br>Number | Product<br>Description                              | Light Output<br>(Usable) | Operating<br>Temperature | Design<br>Voltage (V) | Amp<br>Draw (A) |
|----------------|---|--------------------------|--------------------------|-----------------------|-----------------|
| 61611          | High output, 18 diodes                              | 1200 Lm                  | -40°F to +122°F          | 12                    | 2.16            |
| 61G21          | High output, 18 diodes, w/ motion sensor            | 1200 Lm                  | -4°F to +122°F           | 12                    | 2.16            |
| 61E61          | High output, 18 diodes, dimmable                    | 1200 Lm                  | -40°F to +122°F          | 12                    | 2.17/.71        |
| 61111          | High output, 16 diodes                              | 1000 Lm                  | -40°F to +122°F          | 24                    | 1               |
| 61261          | Standard output, 10 diodes                          | 800 Lm                   | -40°F to +122°F          | 12                    | 1.75            |
| 61F61          | Standard output, 10 diodes w/ motion sensor         | 800 Lm                   | -4°F to +122°F           | 12                    | 1.75/.02        |
| 61881          | Low output, 10 diodes                               | 400 Lm                   | -40°F to +122°F          | 12                    | 1.2             |
| 61291          | Standard output, 6 diodes                           | 940 Lm                   | -40°F to +122°F          | 12                    | 1.7             |
| 61N11          | Standard output, bi-volt, 6 diodes w/ motion sensor | 940 Lm                   | -4°F to +122°F           | 12/24                 | 1.7/.85         |
| 61H91          | Standard output, 6 diodes w/ motion sensor          | 940 Lm                   | -4°F to +122°F           | 12                    | 1.7/.02         |
| 61M11          | Standard output, 6 diodes PIR / interconnected      | 940 Lm                   | -40°F to +122°F          | 12                    | 1.7/.02         |
| 61J11          | Standard output, 6 diodes, 4-wire, Hyundai®         | 940 Lm                   | -4°F to +122°F           | 12                    | .175            |

#### Accessories

| Part Number | Description      | Fits                |
|-------------|------------------|---------------------|
| 94621       | Replacement Lens | Round Corner Lenses |
| 43540       | Mounting Pan     | All 18" Dome Lamps  |
|             |                  |                     |

Materials Housing: Aluminum; Lens: Acrylic (61621, 61F61, 61H91) Housing: Aluminum; Lens: Polycarbonate Finish: White

VMRS Code: 034-004-452

<u>05</u>

Grote

### LED WHITELIGHT RECESSED-MOUNT INTERIOR DOME LAMP





| Part Number        | Product Description   | Designation | Lighting<br>Technology | Connection<br>Type | Light Output<br>(Usable) | Design<br>Voltage (V) | Amp Draw (A)                 |
|--------------------|---|-------------|------------------------|--------------------|--------------------------|-----------------------|------------------------------|
| 61861 MULTI        | Gray Aluminum Housing, 6 Diodes   | Dome        | LED                    | Hardwire           | 300 Lm                   | 12/24                 | .3 @ 12V<br>.16 @ 24V        |
| 61991              | Gray Aluminum Housing, 6 Diodes   | Dome        | LED                    | Hardwire           | 300 Lm                   | 12                    | 0.48                         |
| 61871 MULTI        | Gray Aluminum Housing, 3 Diodes   | Courtesy    | LED                    | Hardwire           | 150 Lm                   | 9-30                  | .32 @ 9V<br>.094 @ 30V       |
| 61931 <i>Multi</i> | Gray Aluminum, Flange Mount Housing,<br>6 Diodes                        | Dome        | LED                    | Hardwire           | 300 Lm                   | 12/24                 | .3 @ 12V<br>.16 @ 24V        |
| 82080 MULTI        | Black Aluminum Housing, 3 White, 3 Red Diodes                           | Dome        | LED                    | Tyco®<br>#770331-1 | 150 Lm                   | 10-30                 | .250 @ 12V<br>.140 @ 24V     |
| 61F30 MULTI        | Black Surface Mount Plastic Housing W/<br>Switch, 4 White, 4 Red Diodes | Dome        | LED                    | Hardwire           | 200 Lm                   | 10-32                 | .250 @ 12.8V<br>.140 @ 25.6V |
| 61F51              | Black Surface Mount Plastic Housing W/<br>Switch, 6 White Diodes        | Dome        | LED                    | Hardwire           | 300 Lm                   | 12                    | .480 @ 14V                   |
| 61031              | Gray Steel Housing  | Dome        | Incandescent           | Hardwire           | 15 CP                    | 12                    | 1.1 @ 12V                    |
| Accessories        |   |             |                        |                    |                          |                       |                              |

#### ACCESSOFIES

| 90401       | Replacement Lens | All  |  |
|-------------|------------------|------|--|
| Part Number | Description      | Fits |  |

VMRS Code: 034-004-083 - 61031 034-004-452 - 61861, 61991, 61871, 67931, 82080, 61F30, 61F51

## Grote

## LED WHITELIGHT 4" DOME LAMP



05

#### **FEATURES & BENEFITS**

- Shock-absorbing, weatherproof housing with long-life LEDs makes this a very durable lamp
- Cost-effective LED lighting option is rated at 50,000 hours
- LEDs utilize lower amp draw, putting less load on strained electrical systems
- Hardwired for easy integration into current wiring system
- Uses 70% less power than incandescent options





| Part Number | Product<br>Description     | Lighting<br>Technology | Light Output<br>(Usable) | Connection<br>Type      | Design<br>Voltage (V) | Amp<br>Draw (A) |
|-------------|----------------------------|------------------------|--------------------------|-------------------------|-----------------------|-----------------|
| 61H51       | 4" Integrated Flange       | LED                    | 400 Lm                   | Hardwire w/2-Way Female | 12                    | .6A             |
| 61E41       | 4" Grommet Mount           | LED                    | 400 Lm                   | Male Pin                | 12                    | .6A             |
| 61H01       | 4" Grommet Mount           | LED                    | 400 Lm                   | Hardwire                | 12                    | .6A             |
| 61171       | 4" Surface Mount w/ Switch | LED                    | 400 Lm                   | Hardwire                | 12                    | .6A             |

Fits

61E41

#### Accessories

Part Number 67013, 66842, 66846, 67016 Description Male Pin Pigtail

VMRS Code: 034-004-452



#### LED WHITELIGHT X-100 DOME LAMP

Built-in automatic thermal protection circuit • Surface mountable; versatile design means both wall or ceiling mountings are possible

Fast installation with 2 self-tapping screws and no holes to cut

61121 White

Material: Polycarbonate Finish: Clear Volts / Amps: 12V / .6A VMRS Code: 034-004-452

## *S100 LED WHITELIGHT SURFACE MOUNT DOME LAMP*

Low profile sleek design, less than 15 mm height • Moisture proof construction allows for a wide variety of uses • Surface mount allows for quick and easy installation • 560 lumens of output • Operates at -40F° to +122F° • ECE R10

61331 S100, 12V/24V w/ motion sensor 61341 S100, 12V/24V



Material: Polycarbonate Finish: White / Clear Volts / Amps: 12V, 24V / 0.6A at 14V, 0.3A at 24V VMRS Code: 034-004-452

#### 4" ROUND FLANGE MOUNT LED DOME LAMP

Hardwire terminations allow for easy connections to the existing wiring system • Chemical resistant acrylic lens, white powder-coated housing • Operates at a wide temperature range, from -40°F to +122°F

61141 White

Material: Aluminum / Acrylic Finish: Clear Volts / Amps: 12V / .48A VMRS Code: 034-004-452



#### LED COMPARTMENT LAMP

Shock and Vibration Proof  $\,\bullet\,$  50,000 hours of service life  $\,\bullet\,$  Can be Recess or Surface Mounted  $\,\bullet\,$  For Interior Use Only

61851Clear, Push Lens for On/Off61851-5Clear, Push Lens for On/Off

Material: Polycarbonate Finish: black Volts / Amps: 12V



#### TORSION MOUNT<sup>®</sup> II 4" ROUND DOME LAMP

Gel-Mount<sup>®</sup> bulb cradle design • O-ring seal pigtail design eliminates corrosion • Locking tabs ensure secure pigtail connection • Hermetic lens-to-housing seal

61451Clear, Male Pin61051Clear, Female Pin

Material: Polycarbonate Finish: Clear Bulb: 15 CP Volts / Amps: 12V / 1.04A Bracket: 43572, 43253, 92510, 92512, 92513 Grommet: 91740, 91950 Pigtail: Male Pin: 67013, 66842, 66846, 67016; Female Pin: 67010, 67011, 67020, 67014 VMRS Code: 034-004-083

#### **ROUND DOME LAMP WITH SWITCH**

Surface mount lamp • Design resists corrosion and lens shattering due to heat build-up • Low profile to protect against knock-off by load or personnel

61161 White Base 61091 Chrome Base

Material: Polycarbonate Finish: Clear Bulb: 93, 15 CP Volts / Amps: 12V / 1.04A Pigtail: 68170 Lens: White 91101 VMRS Code: 034-004-083

#### 6" SURFACE MOUNT DOME LAMP WITH SWITCH

Perfect for use as a compartment lamp • Popular lamp for bus and RV applications • Separate ground wire • Not suitable for use in headliners or confined spaces • Push button

61821 Clear

Material: Aluminum Finish: Clear Bulb: 1141, 21 CP Volts / Amps: 12V / 1.44A VMRS Code: 034-004-083

#### LED WHITELIGHT 7" ROUND DOME LAMP

High-output white LED dome lamp • Encapsulant potting for total circuit board protection against moisture and corrosion • Designed to operate in extreme-cold temperatures down to -40°F • Shallow recess requires only 1 1/4" depth for mounting pan • Self-resetting cut-off feature to protect against excess heat

#### 61811 Clear

Material: Powder-Coated Steel / Acrylic Finish: White / Clear Volts / Amps: 12V / 1.92A VMRS Code: 034-004-452



8.63

mĺ



61793




7" diameter lens • Separate ground wire • Popular for use as a "scare" lamp on RVs • Not suitable for use in headliners or confined spaces

61793 Clear, Stainless Steel Housing

Material: Steel Finish: Stainless / White / Clear Lens Bulb: 1156, 32 CP Volts / Amps: 12V / 2.1A VMRS Code: 034-004-083

#### (330mm) (330mm



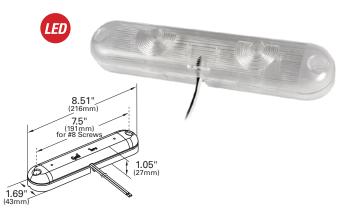

## LED SLIMLITE COURTESY LAMP

Lamp features a low profile less than one inch • High efficiency lamp uses little power and generates minimal heat • Excellent option for cabinet lighting and other interior uses

60581 Clear 60591 Clear, w/ Switch

Material: Polycarbonate Finish: Clear Volts / Amps: 12V / .4A VMRS Code: 034-004-068

#### LED SLIMWHITE

High-output 500-lumen LED dome lamp emits low heat • Tough

- polycarbonate lens
  Sturdy aluminum base
  Profile is less than 3/4" high
  Rated at 50,000 service hours
  61G01 multi-function, illuminate all,
- outer segments, or middle segment

#### 18" LENGTH

| 61E81 | 500 Lm, Frosted            |    |
|-------|----------------------------|----|
| 61E91 | 500 Lm, Frosted            | 24 |
| 61F01 | 500 Lm, Frosted, w/ Switch |    |

48" LENGTH

**61281** 1500 Lm, Frosted **61G01** 2100 Lm, Clear, Multifunction

Material: Polycarbonate/ Aluminum Finish: White Volts / Amps: 18" 12V / .6A; 24V / .3A 48" 12V / 1.2A

VMRS Code: 034-004-068

#### LED CABINET/COMPARTMENT DOME LAMP

Self-resetting cut-off switch to protect against excess current • Designed to operate in extreme cold temperatures down to -40°F • Encapsulant potting for total circuit board protection against moisture and corrosion • Optic long doging for used in the downword waver do protection against moisture and corrosion

Optic lens design focuses light downward/upward based on orientation

61F81 Clear

Material: Polycarbonate Regulations / Standards: SAE J575™ Finish: Clear Volts / Amps: 12V / .35A VMRS Code: 034-004-452



#### OVAL LED WHITELIGHT DOME LAMP

Grote<sup>®</sup> LEDs provide valuable light output with low amp draw • Cost-effective LED lighting option is rated at 50,000 hours

61G31 Clear, Male Pin

Material: ABS / Acrylic Standards: SAE J2139™ Finish: Clear Volts / Amps: 12.8V / .6A Bracket: (requires grommet or flange): 43362, 43952 Flange: 43220, 43223, 43222, 43723, 42153 Grommet: 92420, 92720 Pigtail: 67013, 66842, 66846, 67016 VMRS Code: 034-004-452




#### **EUROSTYLE MAP & DOME LAMP**

Three-way switch: map only, dome/map light, or off • Two options for wiring: either for dome to light or not to light, when door is open

61301 Clear

Material: Nylon / Polycarbonate Finish: Black Volts / Amps: Bulb: Dome - 561, 12 C.P.: 12 V / .97A; Bulb: Map - 1816, 3 C.P.: 12V / .33A VMRS Code: 034-004-083





5.25" (133mm

5.88" sq.

141

#### SQUARE DOME LAMP WITH SWITCH

Three-position switch enables variable intensity: low-6 CP, high-21 CP, or off

• Surface mount • Large enough to cover most existing holes

61221 Clear


Material: ABS/Polycarbonate Finish: Clear Volts / Amps: Bulb: 1016, 21/6 CP: 12V / 1.5A max VMRS Code: 034-004-083

#### DOME LAMP WITH SWITCH

Durable polycarbonate lens • Integrated on/off toggle switch • Raised lens for maximum light dispersion • Comes with ground wire

61491-5 Clear RETAIL

Material: Steel / Polycarbonate Finish: Clear Volts / Amps: Bulb: 1156, 32 CP: 12V / 2.1A VMRS Code: 034-004-083



1.63" (41~~










3.8" (96mm)



#### SMALL RECTANGULAR LED UTILITY LAMP

Long-life LED light source makes this lamp the perfect choice for difficult-to-reach mounting locations  $\bullet$  Uses same UBS pigtails as incandescent for a quick Plug-and-Go^{\circledcirc} retrofit

60421 Clear

Material: Polycarbonate Finish: Clear Volts / Amps: 12V / .2A Bracket: 43380, 43970, 43980 Pigtail: 66850, 67050, 67001, 66851, 66800, 66840 Grommet: 91380 VMRS Code: 034-004-068

#### SMALL RECTANGULAR UTILITY LAMP

Sonically sealed lens • Single 15,000-hour bulb

60271 Clear

Material: Polycarbonate Finish: Clear Bulb: 2 CP Volts / Amps: 12V / .33A Bracket: 43380, 43970, 43980 Pigtail: 66850, 67050, 67001, 66851, 66800, 66840 Grommet: 91380 VMRS Code: 034-002-068

#### **RECTANGULAR LED UTILITY LAMP**

Long-life LED light source makes this lamp the perfect choice for difficult-toreach mounting locations • Uses same UBS pigtails as incandescent for a quick Plug-and-Go<sup>®</sup> retrofit • Hermetic lens-to-housing seal

60411 Clear

Material: Polycarbonate Finish: Clear Volts / Amps: 12V / .2A Bracket: 43780, 43783, 43390, 43790, 43850 Pigtail: 66982, 66980, 66981 VMRS Code: 034-004-068

#### **RECTANGULAR UTILITY LAMP**

Sonically sealed, rectangular double-bulb lamp • Designed for narrow mounting applications • 15,000-hour bulbs

60301 Clear

Material: Polycarbonate Finish: Clear Bulb: 2 CP Volts / Amps: 12V / .66A Bracket: 43390, 43780, 43790, 43850, 43783 Pigtail: 66981, 66982 VMRS Code: 034-004-068



#### 2" LED INTERIOR COURTESY LAMP

Bright, single LED provides ample light for tool boxes, cabinets, and other hard-to-light areas • Encapsulant potting for total circuit board protection against vibration and corrosion

60561 White

Material: Polycarbonate Finish: Clear Volts / Amps: 14V / .2A Bracket: 43690, 43150, 43152, 43153, 43532 Grommet: 92120, 92150, 94100 Pigtail: 66851, 66850, 66840, 67001, 67050, 66801 VMRS Code: 034-004-068



#### TWO-BULB SQUARE CORNER UTILITY LAMP

Ideal courtesy or dome lamp • Attached pigtail with two stainless steel grounds

46791 Clear

Material: Polypropylene / Polycarbonate Finish: Clear Bulb: 1893 (2), 2 CP Volts / Amps: 12V / .66A Pigtail: 67120 Lens: 91961 VMRS Code: 034-004-068

#### 2½" ROUND UTILITY LAMP

Ideal for utility, courtesy or dome applications • Hermetic lens-to-housing seal • 15,000-hour bulb • Twist-on mounting

45811 Clear


Material: Polycarbonate Finish: Clear Bulb: 2 CP Volts / Amps: 12V / .33A Bracket: 43690, 43160, 43163, 43512, 43522 Grommet: 91880, 91890, 91400, 91410, 92070 Pigtail: 66851, 66850, 67001, 67050, 66801, 66800, 66840 VMRS Code: 034-004-068

#### STEPWELL UTILITY LAMP

Rugged, heavy-duty design • Brilliant chrome finish • Easy to install • Includes foam mounting pad


#### 60351 Clear

Material: Die-cast / Polycarbonate Regulations / Standards: FMVSS 108 / SAE L Finish: Chrome Bulb: 906, 6 CP Volts / Amps: 12V / .7A VMRS Code: 034-002-122

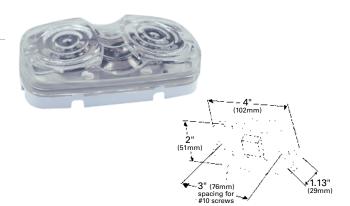











IEI

.75" (19mm) mounting hole

#### LED COURTESY STEPWELL LAMP

Same mounting as popular incandescent versions • Designed to integrate into existing bus electronic platforms • ADA-compliant

60571 White

Material: Stainless Steel / Polycarbonate Finish: Stainless Volts / Amps: 14V / .3A Lens: 93201 VMRS Code: 034-004-256

#### **COURTESY STEPWELL LAMP**

Bright, polished stainless steel construction • High-heat and impactresistant lens • Adjustable hood for directional lighting • Bulb replaceable • Mounting pad and screws included

60361 Clear

Material: Stainless Steel / Polycarbonate Finish: Stainless Bulb: 1142, 21 CP Volts / Amps: 12V / 1.34A VMRS Code: 034-004-122

#### MICRONOVA® DOT LED COURTESY STEPWELL LAMP

Durable one-piece LED lamp design • Hardwire with .180 slim-line UBS plug connections for maximum performance

60721 Lamp with Hooded Grommet

Material: Polycarbonate / PVC Regulations / Standards: FMVSS 108 / SAE L Finish: Clear/Black Volts / Amps: 9-32V / .03A Grommets: 94360 VMRS Code: 034-004-256



5 98

#### HI COUNT® LED COURTESY LAMP

Mounts using two #6 screws • Longer life than incandescent; uses LED technology to reduce maintenance costs

G6261Chrome-Plated SteelG6261-5Chrome-Plated SteelRETAIL

Material: Chrome-Plated Steel Finish: Chrome Volts / Amps: 12V / .02A VMRS Code: 034-004-068



#### **COURTESY LAMP**

Chrome-plated steel housing  $\bullet$  Single-bulb unit similar to lamps on Chevrolet®/GM® vehicles

60251 Clear 60251-5 Clear **RETAIL** 

Material: Steel Finish: Chrome Bulb: 67, 4 CP Volts / Amps: 12V / .59A VMRS Code: 034-004-068

#### LED COMPACT COURTESY LAMP

Fits 1 1/4" hole in panels from 1/16" to 1/8" thick • Rubber-sealed spring and pigtail assembly • Translucent white plastic lens with chrome shade

G6121 Clear G6121-5 Clear RETAIL

Material: Steel Finish: Chrome Volts / Amps: 12V / .02A VMRS Code: 034-004-068

#### **COMPACT COURTESY LAMP**

Fits 1 1/4" hole in panels from 1/16" to 1/8" thick • Rubber-sealed spring and pigtail assembly • Translucent white plastic lens with chrome shade • Chassis ground

60101 Clear 60101-5 Clear **RETAIL** 

Material: Steel Finish: Chrome Bulb: 67, 4 CP Volts / Amps: 12V / .59A Accessory: Socket Wire: 84-1003 VMRS Code: 034-004-068


#### LED COURTESY LAMP

Illuminates instrument panel and compartments • Clear plastic lens

**G6131** Clear **G6131-5** Clear **RETAIL** 

Material: Steel Finish: Chrome Volts / Amps: 12V / .002A VMRS Code: 034-004-068



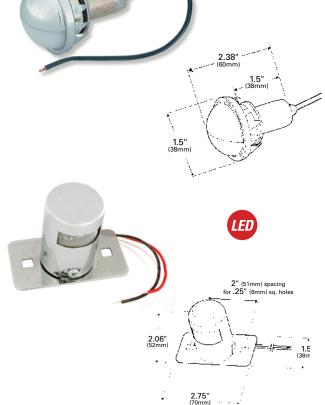




• 2.75" (70mm)

#### **ECONOMY COURTESY LAMP**

Illuminates instrument panel and compartments • Clear plastic lens • Chassis ground

60151 Clear 60151-5 Clear **RETALL** 

Material: Steel Finish: Polished Chrome Bulb: 67, 4 CP Volts / Amps: 12V / .59A Pigtail: 68080 VMRS Code: 034-004-068




#### HI COUNT® INTERIOR/UTILITY LAMP

LED offering provides maximum lighting output in tight spaces • Low power consumption and heat production • Hooded guard to reduce glare


**G6151** Clear **G6151-5** Clear **RETAIL** 

Material: Steel / Polycarbonate Finish: Chrome Volts / Amps: 12V / .025A VMRS Code: 034-004-068



#### INTERIOR/UTILITY LAMP

Chrome-plated housing  $\, \bullet \,$  Hooded guard to reduce glare  $\, \bullet \,$  Separate ground wire



Material: Brass / Polycarbonate Finish: Chrome Bulb: 194, 2 CP Volts / Amps: 12V / .27A VMRS Code: 034-004-068



#### LED ROPE LIGHTING

Flexible rope lighting is perfect for compartments and tool boxes • 50' roll comes with 10 wire connectors, 50 mounting clips and 10 end caps • 1/2" diameter rope • LEDs spaced one per inch

60481 White

Finish: Clear Volts / Amps: 12V / .07A per foot VMRS Code: 034-004-068

#### AUTOMATIC ELECTRONIC DOME LIGHT SWITCH WITH TIMER

Reduces the overall number of components of an interior lighting system
 Eliminates tapping into the air brake delivery system
 Automatic shut down of circuit for no-fuss on/off
 Allows for multiple, simple ground-sensing switches while maintaining the integrity of the interior lighting system
 Timer is factory pre-set for 40 minutes on-time and can be manually shut off or automatically when the vehicle experiences forward/backward acceleration
 Operates at -40C° to +85C°
 Four-wire design
 Designed to replace Grote<sup>®</sup> part number 44360

#### 44440 Dome Lamp Switch

Material: Nylon / G.F., UL94HB / Polycarbonate Standards: SAE J1455<sup>™</sup>, J2139<sup>™</sup>, IP65 Finish: Gray Volts / Amps: 9–16V / 15A max load VMRS Code: 034-004-014

#### **ELECTRONIC DOME LAMP SWITCH**

Solid-state electronic circuitry • Impact resistant PVC construction • Sealed trigger switch • High current-switching capacity of 30 amps, not to exceed 15 operating amps • Wide voltage range: 9 to 16 volts • Three-wire design • Designed to replace Grote<sup>®</sup> part number 44240

#### 44910 Full Feature, Surface Mount MUII

Material: PVC Standards: IP65 Finish: Gray Volts / Amps: 9–14V / .9A max Accessory: Automotive style 15A fuse VMRS Code: 034-004-014

#### **RECESSED MOMENTARY GROUND SWITCH**

Simple switch to reset the timer function of standard "outside-the-trailer" switches • Recessed into the trailer wall to eliminate bumps and knock-offs • Easy to integrate into the current system • For use with 44360, 44440 and 44190 switches

#### 44380 Switch


Material: ABS Standards: SAE J575e™ 1970 Finish: White Volts: .02V–30V (D.C) VMRS Code: 034-004-093


#### ECONOMY FULL-FEATURE TIMER SWITCH

Solid-state, low profile design • Two-hour timer • Fully potted for protection against moisture • 5-amp, field-replaceable blade fuse


44242 Switch

Material: Polycarbonate Finish: Gray Volts: 10–14V VMRS Code: 034-004-093



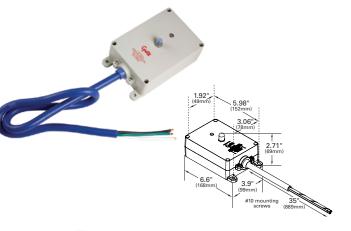






## FEMALE PIN CLEARANCE MARKER PIGTAILS

For more information on pigtail products see Pigtails section: page 254

#### SEALED MARKER LAMP PIGTAILS

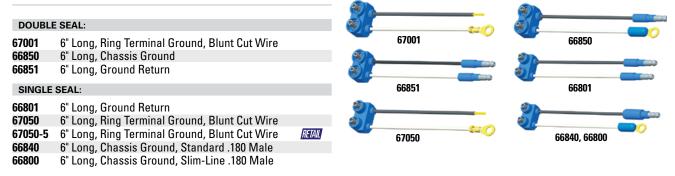

## 2 PIN, MALE PIN CLEARANCE MARKER PIGTAILS

#### **CLEARANCE / MARKER PIGTAILS**

 66980
 6" Long, Chassis Ground, Slim-Line .180 Male

 66981
 6" Long, Universal Replacement, Blunt Cut, Ring<br/>Terminal Grommet

 66982
 8" Long, Ground Return

## PIGTAILS FOR 4" ROUND & 6" OVAL LAMPS

|                | E FUNCTION TWO-WIRE PLUG-IN PIGTAILS<br>ALE PIN LAMPS  | 67013  |       |      |       |       |
|----------------|--|--|-------|------|-------|-------|
| 67013<br>66842 | 11" Long, Chassis Ground, Blunt Clut Wire<br>10" Long, Chassis Ground, Slim-Line .180 Male                     |  |       |      | 66842 |       |
|                | E FUNCTION TWO-WIRE 90° PLUG-IN PIGTAILS<br>ALE PIN LAMPS  |  |       |      |       | -12 M |
| 66846<br>67016 | 10" Long, Chassis Ground, 90° Plug, Slim-Line .180 Male<br>11" Long, Chassis Ground, 90° Plug, Blunt Cut Wires |  | 66846 |      | 67016 | 2     |
| <i>TW0-</i> I  | NIRE PLUG-IN PIGTAILS FOR FEMALE-PIN LAMPS   | <b>9</b> —   | 67010 | ×0 2 | 67011 |       |
| STRAIC         | GHT:   | _  |       |      |       |       |
| 67010<br>67011 | 11 1/2" Long, Chassis Ground, Blunt Cut<br>10 1/4" Long, Chassis Ground, Standard .180 Male                    | ( and the second | 67014 |      | 67020 | 2 10  |
|                |  | _  | 0/014 |      | 07020 |       |
| 90° PLI        | JG:  |  |       |      |       |       |



## PIGTAILS


For more information on pigtail products see Pigtails section: page 254

#### **MARKER LAMP PIGTAIL**

67120 7 3/4" Long, .180 Slim-Line Male

#### **REPLACEMENT LAMP SOCKET PIGTAILS**

68170 9 1/2" Long Single Contact



## 3" LAMP MOUNTING

For more information on mounting products see Mounting Options section: page 264



**GROMMET FOR SMALL RECTANGULAR LAMPS** 

**91380** Black

Material: PVC Finish: Black



#### BRACKET KITS FOR SMALL RECTANGULAR LAMPS

**43970** Gray (+ 67050 pigtail) **43980** Chrome-Plated (+ 67050 pigtail)



#### Material: Polycarbonate/ABS Finish: Chrome/Gray

#### HEADER-MOUNT BRACKET FOR SMALL RECTANGULAR LAMPS

KITS: 43380 White (42141 + 67050)

Material: Polycarbonate Finish: White

## 3" – 5" LAMP MOUNTING



#### MOUNTING BRACKET FOR LARGE RECTANGULAR LAMPS

43780Gray Bracket43783Chrome-Plated Bracket, ABS

KITS: 43390 Gray (43780 + 66981) 43790 Gray (43780 + 66980)

Material: Polycarbonate/ABS Finish: Gray/Chrome



#### LOW PROFILE MOUNTING BRACKET

43850 Gray

Material: Polycarbonate Finish: Gray

## 2" & 2 1/2" LAMP MOUNTING

For more information on mounting products see Mounting Options section: page 264



05

#### **RECESSED MOUNTING GROMMET** FOR 2" ROUND LAMPS

92120 Open Grommet 92150 **Closed Back Grommet** 

94100 Open Grommet (92120 + 67050)

Material: PVC Finish: Black

KITS:



#### **RECESSED MOUNTING GROMMET** FOR 21/2" ROUND LAMPS

91400 **Open Grommet** 92070 **Closed Back Grommet** 

Material: PVC Finish: Black

#### **RECESSED MOUNTING GROMMET** FOR 21/2" ROUND LAMPS

91410 **Open Grommet** 

Material: PVC Finish: Black



#### THEFT-RESISTANT MOUNTING FLANGE FOR 2" ROUND LAMPS

43150 Gray, Polycarbonate 43152 Black, Polycarbonate 43153 Chrome-Plated, ABS

Material: Polycarbonate/ABS Finish: Gray/Black/Chrome

## THEFT-RESISTANT MOUNTING FLANGE FOR 2½" ROUND LAMPS

43160 Gray, Polycarbonate Chrome-Plated, ABS 43163

Material: Polycarbonate/ABS Finish: Gray/Chrome

## 90° ANGLE MOUNTING BRACKET FOR 2" AND 2½" ROUND LAMPS

#### FOR 2 1/2" LAMPS:

- 43512 Accommodates 94010, 91400, 92070 Grommets (2 25/32" Hole) 43522
  - Accommodates 94000, 91410 Grommets (3" Hole)

#### FOR 2" LAMPS:

43532 Accommodates 94100, 92120, and 92150 Grommets (2 5/16" Hole)

Material: Steel Finish: Black Enamel



TWIST-IN SURFACE MOUNT BRACKET FOR 2" AND 2½" ROUND LAMPS

43690 Gray

Material: Polycarbonate Finish: Gray





#### 45° ANGLED BEVELED-EDGE RECESSED MOUNTING GROMMET FOR 21/2" ROUND LAMPS

91880 **Open Grommet** 

Material: PVC Finish: Black

#### SURFACE MOUNT GROMMET FOR 21/2" ROUND LAMPS

91890 **Open Grommet** 

Material: PVC Finish: Black

MICRONOVA® LAMP MOUNTING



HOODED MICRONOVA® DOT GROMMET

94360 Black

Material: PVC Finish: Black

## **4" LAMP MOUNTING**

For more information on mounting products see Mounting Options section: page 264



#### RECESSED MOUNTING GROMMET FOR 4" ROUND LAMPS

91740 Grommet

Material: PVC Finish: Black



#### ANGLED MOUNTING BRACKET FOR 4" ROUND LAMPS

43572 Black, 90° angle bracket

Material: Steel Finish: Black Powder-Coated Grommet: 91740

## 6" LAMP MOUNTING



#### RECESSED MOUNTING GROMMET FOR 6" OVAL LAMPS

92420 Open Grommet 92720 Closed Back Grommet

Material: PVC Finish: Black




#### ANGLED MOUNTING BRACKET FOR 6" OVAL LAMPS

43362 Black, 90° angle bracket

Material: Steel Finish: Black Grommet: 92420

## **REPLACEMENT LENSES**



GM® is a registered trademark of General Motors LLC; Chevrolet® is a registered trademark of General Motors LLC. Hyundia® is a registered trademark of HYUNDAI MOTOR COMPANY; Tyco® is a registered trademark of Tyco Internation Services GmbH LIMITED LIABILITY COMPANY SWITZERLAND;

All product and company names are trademarks™ or registered<sup>®</sup> trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them.



05

| 92510 | White, Polycarbonate |
|-------|----------------------|
| 92512 | Black, Polycarbonate |
| 92513 | Chrome-Plated, ABS   |
| 92511 | Gray, Polycarbonate  |
| 43253 | Stainless Steel      |

Material: Polycarbonate; Stainless Steel; ABS

#### *"Z" MOUNTING BRACKET FOR 6" OVAL LAMPS*

43952 Black

Material: Steel Finish: Black Grommet: 92420