

Grote LED Radius Light

Data Sheet - Aftermarket

WORK LIGHTING



PRODUCT SPECIFICATIONS

MATERIALS

Polycarbonate Lens
Cast Aluminum Housing
Weight: 16 oz.

RATINGS AND COMPLIANCES

Ingress Protection: IP69K
MIL-STD-202G (Vibration)
SAE J575-4.14 (Chemical Resistant)
SAE J2139-4.4 (Corrosion)
SAE J2139 (Humidity/Temperature)

LIGHT ENGINE

LED
Lumens: 1200 Instant On, 1100 Effective

OPTICS

Lens Optics: Total Internal Reflection
Pattern: Grote Proprietary Wide Flood

ELECTRONIC CHARACTERISTICS


12/24 Volts, 1.5 / 0.75 Amps, 18 Watts
Overvoltage Protection



Gasket for Surface Mounting




Spacer/Wire Guide

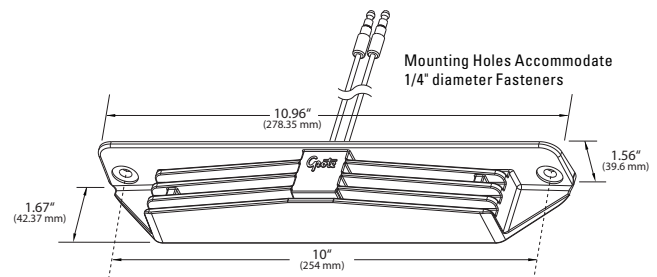

Rugged, dependable coverage for safety and security.

- Tough, durable, and lightweight cast aluminum housing
- Six-200 lumen LEDs that produce daylight-like visibility in a broad area
- TIR Lens for efficiently distributed lighting
- Bi-Voltage System for 12 volt and 24 volt systems
- Vibration, dust, corrosion, and moisture resistant
- Reverse polarity protection and overvoltage protection to prevent voltage spike damage
- Spacer designed for extended installation and wire routing

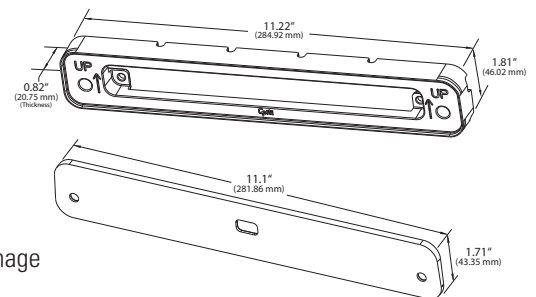

Part Number	Description	Voltage (V)	Amperage (A)
64M11-5	GROTE RADIUS LIGHT ASSEMBLY (includes Spacer with 0.642 inch depth and Gasket used for surface mounting)	12/24 VOLT	1.5 @ 12V / 0.75 @ 24V

2600 Lanier Drive, Madison, Indiana U.S.A. 47250-0550

U.S. 800.628.0809 Canada 800.268.5612

Europe +49 9962/20008-0 Mexico 011 (52) 81-8262-4400



grote.com



Grote LED Radius Light

Data Sheet - Aftermarket

W O R K L I G H T I N G

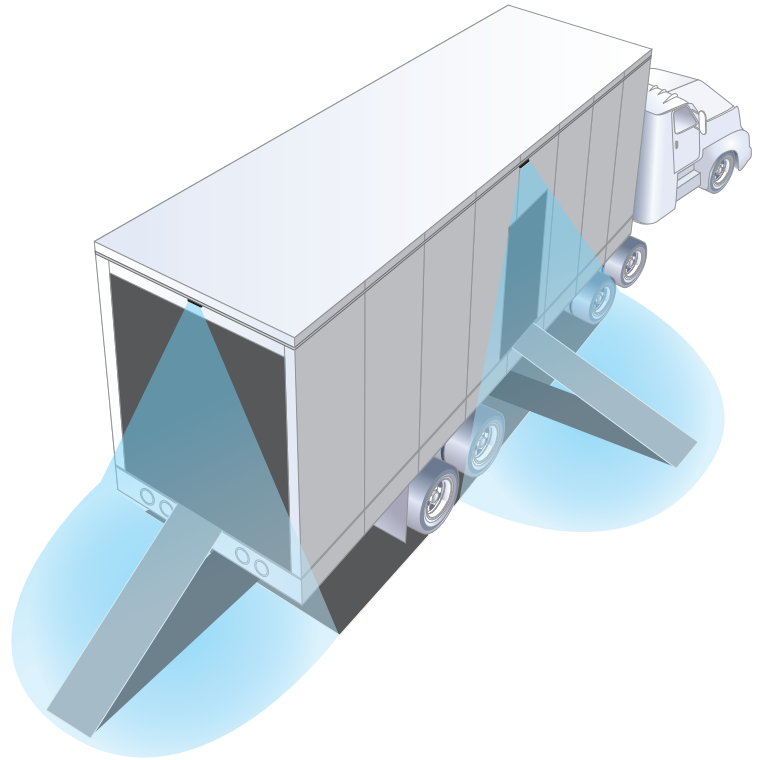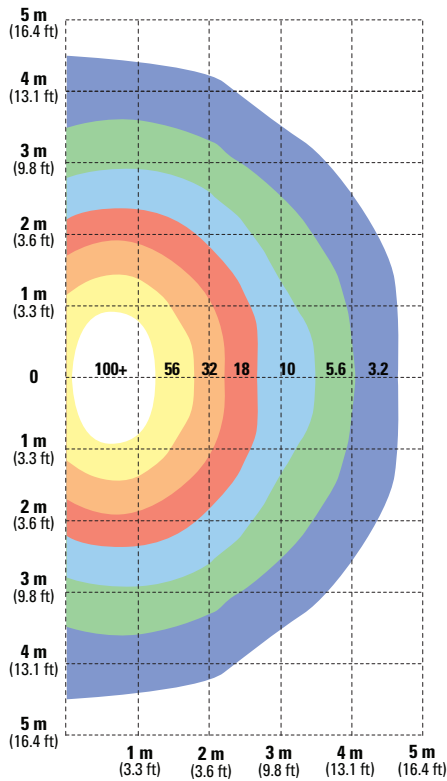

Illuminance (Lux)



Without Radius Light



With Radius Light



2600 Lanier Drive, Madison, Indiana U.S.A. 47250-0550

U.S. 800.628.0809 Canada 800.268.5612

Europe +49 9962/20008-0 Mexico 011 (52) 81-8262-4400

grote.com