

# S100 LED WhiteLight™ Surface Mount Dome Lamps

Data sheet

INTERIOR LIGHTING



61341



61331

## PRODUCT SPECIFICATIONS

### MATERIAL

Polycarbonate Housing, White

### ELECTRONIC CHARACTERISTICS

Operating Voltage: 9V to 16V; 18V to 32V

Operating Temperature: -20C to 50C with sensor; -40C to 50C without sensor

### RATINGS AND COMPLIANCES


Moisture: FMVSS 108 S14.5.2

Dust: FMVSS 108 S14.5.3

Vibration: SAE J2139 S4.1

Thermal: SAE J1889 S5.3

ECE R10

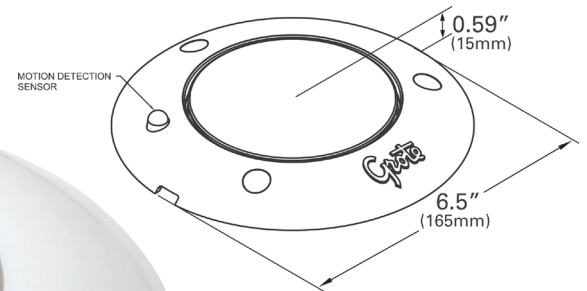

LED WhiteLight™ technology putting 560 lumens where you need light most

- **Slim design** - Low profile at 15mm in height provides less intrusion and easy mounting.
- **PIR Sensor** - Activates lamp once detects a moving body of different temperature within 3 meters. Turns off after 3 minutes of no detection.

Part Number	Description	# of LED Diodes	Effective Lumens	Voltage	Amperage
61331	S100 w/Motion Sensor, Bi-Voltage	12	560	12V/24V	0.6A @ 14V / 0.3A @ 28V
61341	S100, Bi-Voltage	12	560	12V/24V	0.6A @ 14V / 0.3A @ 28V

2600 Lanier Drive, Madison, Indiana U.S.A. 47250-0550

U.S. **800.628.0809** Canada **800.268.5612**

Europe **+49 9422 40331-0** Mexico **+(52) 818262 4412** China **+86.21.5774.9633**

[grote.com](http://grote.com)

