

LED TRAFFIC DIRECTORS (DIRECTORS, ARROWS) FROM GROTE



ALUMINUM
CONSTRUCTION



MADE IN
NORTH AMERICA

14

BRIGHTNESS
SETTINGS




5-YEAR
WARRANTY

VOLTAGE: 10-16 VDC
78200 AMP DRAW: 1.6 AMPS @ 12.8 VDC **78210 AMP DRAW:** 2.4 AMPS @ 12.8 VDC **78270 AMP DRAW:** 3.2 AMPS @ 12.8 VDC **98523 OPERATING RANGE:** 9-16 VDC
98523 AMP DRAW: 2 OUTPUTS @ 2.5 AMPS AVG. (5 AMP PEAK), 2 OUTPUTS @ 0.06 AMPS AVG.
MATERIAL: POLYCARBONATE/ALUMINUM
MOUNTING TYPE: PERMANENT
OPERATING TEMPERATURE: -30°C (-22°F) TO +50°C (122°F)

MAXIMIZE SAFETY WITH CONFIDENCE


Safely control traffic through a work area from inside the vehicle with Grote's LED traffic directors. Including four modes with distinctive flash options, these purpose-built traffic directors are made from durable extruded aluminum, and will not warp or bend.

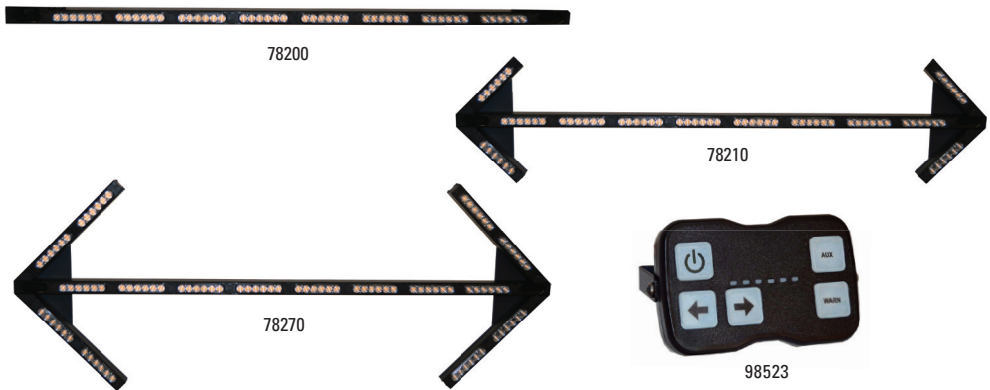

FEATURES & BENEFITS

- Micro-processor control unit offers four modes with distinctive flash options
- Front load for easy replacement of individual heads
- Modes: left arrow, right arrow, center out, and warn (alternating)
- Ships complete with back-lit control unit, standard 35' wiring harness, L-brackets, hardware, and instructions
- 98523: Traffic director controller, with ability to be programmed to control up to 4 warning/lighting devices
- Controller: 14 brightness settings
- 5-year warranty

PART #	DESCRIPTION
78200	LED TRAFFIC DIRECTOR
78210	SMALL LED TRAFFIC DIRECTOR WITH ARROW
78270	LARGE LED TRAFFIC DIRECTOR WITH DUAL LAMP ARROW
98523	PROGRAMMABLE CONTROLLER, 5 BUTTON, OPERATE UP TO 4 LIGHTS/DEVICES
SERVICE PARTS	
98343	REPLACEMENT MODULE FOR TRAFFIC DIRECTOR (78200, 78210, 78270)

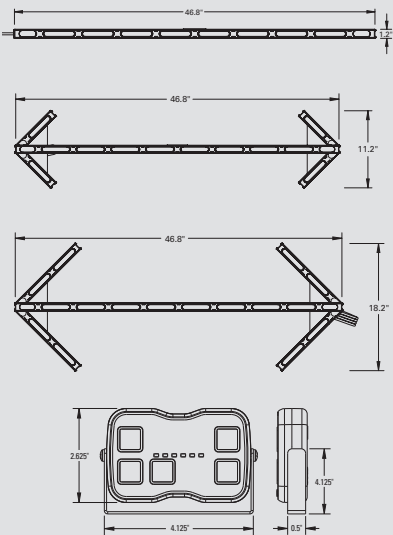

EZ-FIND

SCAN FOR TECH SPECS,
RELATED PRODUCTS
AND MORE

FOR MORE INFORMATION
VISIT OUR WEBSITE.
GROTE.COM

