


# XTL<sup>®</sup> Xtreme Truck Bundle

Data Sheet

X T L<sup>®</sup>

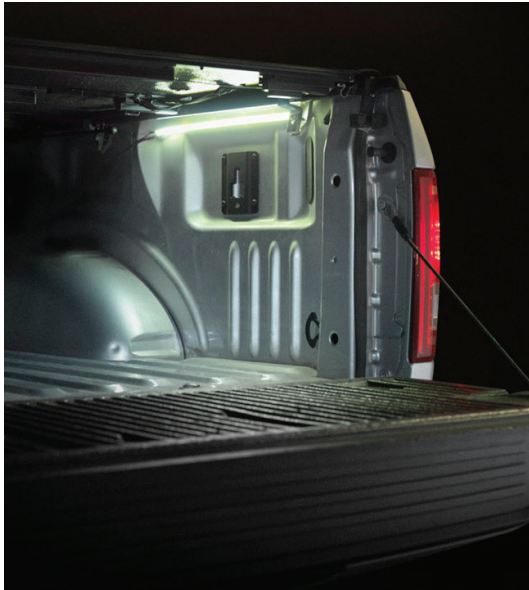

## XTL STRIP PRODUCT SPECIFICATIONS

**OPERATING TEMPERATURE:** -40 to 149°F (-40 to +65°C)  
**STORAGE TEMPERATURE:** < 194°F | 90°C  
**INPUT VOLTAGE RANGE:** +10 to +14 VDC  
**MINIMUM BENDING RADIUS:** (Length) 0.5 in | 12.7 mm

## XTL STRIP COMPLIANCES

**IMPACT RESISTANCE:** SAE J575 sec. 4.3  
**THERMAL SHOCK:** SAE J1455 sec. 4.1.3.2  
**UV WEATHERING:** SAE J2412 & J2527  
**HUMIDITY:** SAE J1455 sec. 4.7  
**INGRESS PROTECTION:** IP67 & IP69K  
**CORROSION:** SAE J2139  
**VIBRATION:** SAE J575 sec. 4.2  
**FLAMMABILITY:** FMVSS 302; UL 94 HTM-0, UL 94 VTM-0  
**CHEMICAL RESISTANCE:** SAE J1455 sec 4.4  
**ABRASION:** SAE J1455 sec. 4.8 & J400  
**REVERSE POLARITY:** SAE J121239  
**STATIC DISCHARGE:** SAE J1113

## BATTERY BOX COMPLIANCES

**INGRESS PROTECTION:** IP65  
**MECHANICAL LIFE:** (Switch) 1.5 Million Cycles  
**MATERIAL:** ABS

## XTL Xtreme Truck Bundle lets you put light where you want it

- Use the XTL Xtreme Truck Bundle to light up your pick-up truck, SUV, RV, utility trailer-any place where light is needed and power is not readily available.
- Two kit options; choose standard (185 lumens) or extreme (371 lumens) with a long lasting battery box
- Expandable kit allows the user to connect to 12V power and add (3) strips of different lengths and light output
- Grote UBS wire harness uses sealed connections and includes a professional installation kit



PART NO.	DESCRIPTION	LIGHT LENGTH (IN   MM)	LIGHT WIDTH (IN   MM)	LIGHT HEIGHT (IN   MM)	LED SPACING (IN   MM)	CURRENT AMPS (@ 13.5 VOLTS)	LUMENS	LIFE EXPECTANCY (PER SET OF 8AA BATTERIES)
61K71	STANDARD LIGHT STRIP W BATTERY BOX	18.89 / 480	.62 / 15.8	.28 / 7.15	.5 / 12	0.163	185	60+ HRS
61K61	EXTREME WHITE LIGHT STRIP W BATTERY BOX	18.89 / 480	.62 / 15.8	.28 / 7.15	.25 / 6	0.325	371	35+ HRS
68510	EXPANDABLE WIRE HARNESS AND INSTALLATION KIT							
98150-5	REPLACEMENT BATTERY BOX							

PART NO.	DESCRIPTION	LENGTH (IN   MM)	WIDTH (IN   MM)	HEIGHT (IN   MM)	LED SPACING (IN   MM)	CURRENTS AMPS (@ 13.5 VOLTS)	LIGHTING OUTPUT (@ 13.5 VOLTS)	LUMENS PER WATT
L14521001	WHITE LED STRIP	18.89   480	.62   15.8	.28   7.15	.5   12	0.163	185 LUMENS	84
L12521001	WHITE LED STRIP	22.67   576	.62   15.8	.28   7.15	.5   12	0.191	215 LUMENS	83
L13521001	WHITE LED STRIP	34.02   864	.62   15.8	.28   7.15	.5   12	0.274	320 LUMENS	87
L14121001	EXTREME WHITE LED STRIP	18.89   480	.62   15.8	.28   7.15	.25   6	0.325	371 LUMENS	85
L12121001	EXTREME WHITE LED STRIP	22.67   576	.62   15.8	.28   7.15	.25   6	0.397	440 LUMENS	82
L13121001	EXTREME WHITE LED STRIP	34.02   864	.62   15.8	.28   7.15	.25   6	0.372	478 LUMENS	95



GLB-2017-029

2600 Lanier Drive, Madison, Indiana U.S.A. 47250-0550

U.S. 800.628.0809 Canada 800.268.5612

Europe +49 9422 40331-0 Mexico +(52) 818262 4412 China +86.21.5774.9633

[grote.com](http://grote.com)

