




09

BATTERY CONNECTORS & CABLE

CONNECTEURS ET
CÂBLES DE BATTERIE

TERMINALES Y CABLES
PARA BATERIA

- 134 Battery Connectors
- 142 Conversion Connectors and Adapters
- 144 Booster Clamps and Cables
- 145 Charging Clips
- 146 Booster Cable – Twin Conductor
- 148 Battery Cables
- 152 Battery Disconnect Switches
- 153 Battery Protective Products
- 154 Crimpers and Cutters
- 156 Battery Boxes
- 159 Hold-downs and Trays
- 160 Battery Cable
- 161 Welding Cable



GROTE'S HAS A COMPLETE LINE OF BATTERY CONNECTORS, CABLE, REPLACEMENT AND SERVICE PARTS, TEST CLIPS AND TERMINAL PROTECTIVE PRODUCTS AND OF COURSE CHARGING OPTIONS FOR ALL OF YOUR EQUIPMENT'S POWER DELIVERY NEEDS.

LIGHT DUTY, HOME AND GARDEN EQUIPMENT, HEAVY VEHICLE OR INDUSTRIAL APPLICATIONS – GROTE HAS THE BATTERY CONNECTION PRODUCT YOU NEED!



Proper connections to a vehicles power supply are vital to performance. Make the right choice – go with Grote Battery Connectors and Cables.

DIE-CAST BATTERY CONNECTORS



- Copper die-cast and bright tin plating exceeds SAE J163 & J1811 conductivity standards by 25 times
- Ultra-smooth, pit-free cast surface resists against harmful materials and corrosion
- Can be crimped or soldered; can be installed with most major crimping tools
- Provides full height post connection
- Includes 5/16" battery bolts and shoulder nuts; fasteners included
- Clamps are marked for easy identification
- Listed by UL STD. 486A & cUL® US when applied with Hex Crimp 84-9082
- Made in North America; Available in Retail and Bulk sizes
- Rated to 600V; lead-free

STRAIGHT BARREL CLAMP



CABLE GAUGE	COLOR CODE	RETAIL PACK SIZE	NEGATIVE	POSITIVE	BULK PACK SIZE	NEGATIVE	POSITIVE
4	Grey	1	82-9053	82-9054	5	84-9053	84-9054
2	Green	1	82-9050	82-9051	5	84-9050	84-9051
1	Pink	1	82-9047	82-9048	5	84-9047	84-9048
1/0	Black	1	82-9056	82-9057	5	84-9056	84-9057
2/0	Orange	1	82-9058	82-9059	5	84-9058	84-9059
3/0	Purple	1	82-9060	82-9061	5	84-9060	84-9061
4/0	Yellow	1	82-9062	82-9063	5	84-9062	84-9063

FLAG CONNECTOR



CABLE GAUGE	COLOR CODE	RETAIL PACK SIZE	NEGATIVE	POSITIVE	BULK PACK SIZE	NEGATIVE	POSITIVE
1/0	Black	1	82-9095	82-9096	5	84-9095	84-9096
2/0	Orange	1	82-9097	82-9098	5	84-9097	84-9098
3/0	Purple	1	82-9099	82-9100	5	84-9099	84-9100
4/0	Yellow	1	82-6010	82-6011	5	84-6010	84-6011

RIGHT AND LEFT ELBOW



CABLE GAUGE	COLOR CODE	ANGLE	RETAIL PACK SIZE	NEGATIVE	POSITIVE	BULK PACK SIZE	NEGATIVE	POSITIVE
1/0	Black	Right	1	82-9640	82-9641	5	84-9640	84-9641
1/0	Black	Left	1	82-9642	82-9647	5	84-9642	84-9647
2/0	Orange	Right	1	82-9648	82-9649	5	84-9648	84-9649
2/0	Orange	Left	1	82-9650	82-9651	5	84-9650	84-9651
3/0	Purple	Right	1	82-9652	82-9653	5	84-9652	84-9653
3/0	Purple	Left	1	82-9654	82-9655	5	84-9654	84-9655

HEAVY WALL COPPER LUGS

- Use on stud style batteries

CABLE GAUGE	COLOR CODE	5/16" (8 MM)	3/8" (10 MM)	1/2" (12 MM)	PACK SIZE
4	Grey	84-9105	84-9106	–	5
2	Green	–	84-9103	–	5
1	Pink	–	84-9101	–	5
1/0	Black	–	84-9108	84-9109	5
2/0	Orange	–	84-9110	84-9111	5
3/0	Purple	–	84-9112	84-9113	5
4/0	Yellow	–	84-9114	84-9115	5



84-9110

STUD/SIDE LOCKING LUG

CABLE GAUGE	COLOR CODE	3/8" (10 MM)	PACK SIZE
1/0	Black	84-9308	5
2/0	Orange	84-9309	5
3/0	Purple	84-9310	5
4/0	Yellow	84-9311	5



84-9309

SPLICES – TIN PLATED

- Seamless 100% copper tube construction
- Heavy tin-plated for superior conductivity and resistance to corrosion
- Can be crimped or soldered – ideal for most applications

CABLE GAUGE	RETAIL PACK	PACK SIZE	BULK PACK	PACK SIZE
8	82-9552	2	84-9552	10
6	82-9463	2	84-9463	10
4	82-9448	2	84-9448	10
2	82-9553	2	84-9553	10
1	82-9554	2	84-9554	10
1/0	82-9555	2	84-9555	10
2/0	82-9556	2	84-9556	10
3/0	82-9557	2	84-9557	10
4/0	82-9558	2	84-9558	10



84-9448

82-9556

UNINSULATED BRAZED SEAM LUGS


- 100% copper tin-plated
- Serrated barrel increases pull-out strength of hard-to-crimp wire
- Can be crimped or soldered
- Ideal for solder dipping applications
- Lead-free

CABLE GAUGE	STUD SIZE	BULK PACK	PACK SIZE
8	#10	84-9548	10
6	1/2"	84-9442	10
4	1/2"	84-9443	10



84-9443

MAGNALUG® CONNECTORS



STANDARD LUG



MAGNALUG®

- MagnaLugs® are superior to standard tube lugs
- Wider pad for better electrical contact; thicker pad for greater strength & conductivity
- Exceeds SAE conductivity standards J163 and J1811
- MagnaLugs® listed by UL STD. 486A & cUL® US when applied with Hex Crimp 84-9082
- Up to 80% heavier wall than standard lugs
- Made of 100% copper, tin-plated twice as thick as industry standards
- For truck, bus, farm or construction equipment
- Excellent for commercial or industrial applications
- Flameless installation, safe for repair shop or field repair
- Lead-free

STARTER/GROUND COPPER LUGS



84-9208

CABLE GAUGE	COLOR CODE	1/4" (6 MM)	5/16" (8 MM)	3/8" (10 MM)	1/2" (12 MM)	PACK SIZE
8	Grey	84-9461	84-9635	—	—	5
6	Grey	—	—	84-9636	—	5
4	Grey	84-9199	—	84-9200	84-9201	5
1 & 2	Pink	84-9196	—	84-9197	84-9198	5
1/0	Black	84-9202	—	84-9203	84-9204	5
2/0	Orange	84-9205	84-9637	84-9206	84-9207	5
3/0	Purple	—	—	84-9208	84-9209	5
4/0	Yellow	—	—	84-9210	84-9211	5

LOCKING ANTI ROTATIONAL STACKABLE LUG



84-9192

CABLE GAUGE	COLOR CODE	3/8" (10 MM)	PACK SIZE
1/0	Black	84-9192	5
2/0	Orange	84-9193	5

SPLICES



84-9220

CABLE GAUGE	COLOR CODE	RETAIL PACK	PACK SIZE	BULK PACK	PACK SIZE
4	Grey	82-9219	2	84-9219	10
1 & 2	Pink	82-9218	2	84-9218	10
1/0	Black	82-9220	2	84-9220	10
2/0	Orange	82-9221	2	84-9221	10
3/0	Purple	—	2	84-9222	10
4/0	Yellow	—	2	84-9223	10

WE KNOW THE POWER OF A GOOD CONNECTION



At Grote Industries, **WE ARE COMMITTED TO TAKING CARE OF OUR CUSTOMERS** by ensuring that they receive the information and products they need, when they need them. That's why we are continually investing in industry-leading technology that allows us to connect to our valued customers.

CONNECT YOUR FLEET WITH GROTE GROW YOUR FLEET WITH GROTE

Grote offers fleets full-service partnership support so you can stop worrying about inventories or suppliers. Grote can even provide comprehensive training to your maintenance partners, to ensure you get the most benefit from your Grote Electrical Connections and Accessory products. Connect with our experienced team of technical, sales & customer solution experts. Connect with our digital tools and **G24/7 ONLINE CUSTOMER SERVICE PLATFORM**. Limit unplanned maintenance downtime, and improve your fleet's safety and profitability, with our innovative and high quality electrical connection and accessory products.



CONTACT US

CALL US AT 1-800-268-5612, OR CHECK OUT OUR G24/7 ONLINE CUSTOMER SERVICE PLATFORM AT SHOP.GROTE.COM

TIN PLATED COPPER TUBE LUGS



- Seamless 100% copper tube construction
- Can be crimped/soldered; ideal for general wiring, starter, ground applications
- Heavy tin-plated for superior conductivity and resistance to corrosion
- Flared barrel for easy installation of cables
- Available in clam shell packaging or bulk bag
- Lead-free



CABLE GAUGE	STUD SIZE	RETAIL PACK	PACK SIZE	BULK PACK	PACK SIZE
8	#10	82-9164	2	84-9164	25
8	1/4"	82-9165	2	84-9165	25
8	5/16"	82-9537	2	84-9537	25
8	3/8"	82-9523	2	84-9523	25
8	1/2"	82-9547	2	84-9547	25
6	#10	82-9524	2	84-9524	25
6	1/4"	82-9166	2	84-9166	25
6	5/16"	82-9167	2	84-9167	25
6	3/8"	82-9168	2	84-9168	25
6	1/2"	82-9525	2	84-9525	25
4	1/4"	82-9317	2	84-9317	25
4	5/16"	82-9169	2	84-9169	25
4	3/8"	82-9170	2	84-9170	25
4	1/2"	82-9527	2	84-9527	25
2	1/4"	82-9318	2	84-9318	25
2	5/16"	82-9319	2	84-9319	25
2	3/8"	82-9171	2	84-9171	25
2	1/2"	82-9172	2	84-9172	25
1	1/4"	82-9528	2	84-9528	25
1	5/16"	82-9533	2	84-9533	25
1	3/8"	82-9173	2	84-9173	25
1	1/2"	82-9174	2	84-9174	25
1/0	1/4"	82-9535	2	84-9535	25
1/0	5/16"	82-9534	2	84-9534	25
1/0	3/8"	82-9175	2	84-9175	25
1/0	1/2"	82-9176	2	84-9176	25
2/0	5/16"	82-9536	2	84-9536	25
2/0	3/8"	82-9177	2	84-9177	25
2/0	1/2"	82-9178	2	84-9178	25
3/0	3/8"	82-9179	2	84-9179	25
3/0	1/2"	82-9180	2	84-9180	25
4/0	3/8"	82-9181	2	84-9181	25
4/0	1/2"	82-9182	2	84-9182	25



84-9175



83-6544

TIN PLATED COPPER TUBE LUG ASSORTMENT KIT

- Includes 76 of the most popular automotive & heavy duty copper tube lugs
- Heavy tin plated for superior conductivity and resistance to corrosion
- Can be crimped or soldered
- 12 compartment resealable box with re-order chart on inside cover

83-6544 8 – 3/0 GA Copper Tube Lugs

STANDARD COPPER TUBE LUGS



- Seamless 100% copper tube construction
- Can be crimped or soldered – ideal for most general purpose applications
- Flared barrel for easy installation of cables
- Available in clam shell packaging or bulk bag
- Lead-free



CABLE GAUGE	STUD SIZE	RETAIL PACK	PACK SIZE	BULK PACK	PACK SIZE
8	#10	82-9521	2	84-9521	25
8	5/16"	82-9538	2	84-9538	25
8	3/8"	82-9428	2	84-9428	25
8	1/2"	82-9539	2	84-9539	25
6	#10	82-9514	2	84-9514	25
6	1/4"	82-9522	2	84-9522	25
6	5/16"	82-9512	2	84-9512	25
6	3/8"	82-9429	2	84-9429	25
6	1/2"	82-9513	2	84-9513	25
4	1/4"	82-9515	2	84-9515	25
4	5/16"	82-9516	2	84-9516	25
4	3/8"	82-9430	2	84-9430	25
4	1/2"	82-9529	2	84-9529	25
2	1/4"	82-9517	2	84-9517	25
2	5/16"	82-9518	2	84-9518	25
2	3/8"	82-9431	2	84-9431	25
2	1/2"	82-9530	2	84-9530	25
1	1/4"	82-9519	2	84-9519	25
1	5/16"	82-9531	2	84-9531	25
1	3/8"	82-9432	2	84-9432	25
1	1/2"	82-9520	2	84-9520	25
1/0	1/4"	82-9545	2	84-9545	25
1/0	5/16"	82-9532	2	84-9532	25
1/0	3/8"	82-9433	2	84-9433	25
1/0	1/2"	82-9434	2	84-9434	25
2/0	5/16"	82-9546	2	84-9546	25
2/0	3/8"	82-9435	2	84-9435	25
2/0	1/2"	82-9436	2	84-9436	25
3/0	3/8"	82-9437	2	84-9437	25
3/0	1/2"	82-9438	2	84-9438	25
4/0	3/8"	82-9439	2	84-9439	25
4/0	1/2"	82-9440	2	84-9440	25



84-9436



83-6543

COPPER TUBE LUG ASSORTMENT KIT

- Includes 76 of the most popular automotive & heavy duty copper tube lugs
- Provides superior conductivity
- Can be crimped or soldered
- 12 compartment resealable box
- Re-order chart on inside cover

83-6543 8 – 3/0 GA Copper Tube Lugs

BATTERY CONNECTORS – HEAVY DUTY



84-9133

- Clamps designed for truck, bus, construction, agricultural, industrial applications
- Polarity-specific brass or universal polarity lead construction; hardware included
- Accept 1 through 4/0 gauge cable

DESCRIPTION	MATERIAL	RETAIL PACK	PACK SIZE	BULK PACK	PACK SIZE
Universal Clamp 1-4/0 Gauge	Lead; zinc-plated, steel fasteners	82-9133	2	84-9133	25

BATTERY CONNECTORS – AUTOMOTIVE



82-9613

84-9134

84-9126

- Automotive and light truck applications
- Universal clamp and side terminal styles; constructed of lead or brass
- Accept 6 through 2/0 gauge cable sizes
- Zinc-plated steel hardware included

DESCRIPTION	MATERIAL	RETAIL PACK	PACK SIZE	BULK PACK	PACK SIZE
Universal Clamp	Lead; zinc-plated, steel fasteners	82-9135	2	84-9135	25
Universal Clamp	Brass; zinc-plated, steel fasteners	82-9126	1	84-9126	25
Universal Clamp	Lead; epoxy coated 1 red, 1 black	82-9613	2		
Universal Side Terminal	Lead; zinc-plated, steel fasteners	82-9134	2	84-9134	25

AUTOMOTIVE TERMINAL CLAMPS



84-9671

TOP POST & SIDE MOUNT, CARDS OF 10

- Both products offered in convenient cards of 10 pieces per card
- Both accept 6 through 2/0 gauge cable

PART #	DESCRIPTION
84-9671	Automotive Top Post Terminal Clamps
84-9672	Automotive Side Mount Terminal Clamps

LEAD FREE CONNECTORS



84-9618

82-9597

- Accept 8 through 4 gauge cable sizes
- Tin plated alloy resists corrosion
- For recreational and light duty applications

DESCRIPTION	BULK PACK	PACK SIZE
Top Post, 8-6-4 GA	84-9618	5 Pair (Pos/Neg)
Top Post, 8-6-4 GA, with auxiliary take off	82-9597	1 Pair (Pos/Neg)

- Converts battery post to stud connector
- Permits quick disconnection from battery; eliminates current drain during storage
- Polarity-specific; meets U.S. Coast Guard regulations
- Brass or lead construction; hardware included



DESCRIPTION	SIZE	MATERIAL	RETAIL PACK	PACK SIZE	BULK PACK	PACK SIZE
Top Post; Positive	5/16"	Brass; zinc-plated steel fasteners	82-9124	1	84-9124	25
Top Post; Positive	3/8"	Lead; zinc-plated steel fasteners	82-9541	1	84-9541	25
Top Post; Negative	5/16"	Brass; zinc-plated steel fasteners	82-9125	1	84-9125	25
Top Post; Negative	5/16"	Lead; zinc-plated steel fasteners	82-9542	1	84-9542	25

BATTERY CONNECTORS – MARINE



84-9124

84-9542

BATTERY CONNECTORS – MILITARY



84-9580

- Exceeds military specifications # A52425-1 & A52425-2
- Low profile design, only 3/4" high
- Long bolt permits additional power connections

DESCRIPTION	MATERIAL	BULK PACK	PACK SIZE
Top Post; Positive	Lead; zinc plated steel fasteners	84-9581	5
Top Post; Negative	Lead; zinc plated steel fasteners	84-9580	5

TOP POST – 3 WAY TERMINAL



82-9620

- Accept 2 through 1/0 gauge cable sizes
- Zinc plated, steel fasteners

DESCRIPTION	MATERIAL	RETAIL PACK	PACK SIZE
Top Post	Lead, 1 pos., 1 neg.	82-9620	1 pair

BATTERY QUICK DISCONNECT

- 1/4" turn of the knob disconnects battery power
- Lead-free
- Copper; brass plated with zinc plated steel fasteners

DESCRIPTION	RETAIL PACK	PACK SIZE
Top Post, Negative	82-9595	1
Side Terminal, Universal	82-9596	1



82-9595

82-9596

CONVERSION CONNECTORS

STUD-TO-TOP POST



84-9130

- Converts stud terminal battery to top post
- Polarity specific for exact fit
- 3/8" – 16 threaded steel insert and nylon lock ring provide superior electrical and mechanical integrity
- 3/4" hex base permits precise torquing

DESCRIPTION	SIZE	MATERIAL	RETAIL PACK	PACK SIZE	BULK PACK	PACK SIZE
Stud to Top Post	3/8"-16	Lead; die-cast steel	82-9130	1 pair	84-9130	5 pair

CONVERSION CONNECTORS

SIDE TERMINAL-TO-TOP POST



84-9131

- Permits top terminal cable connection to side terminal battery
- Stud head resists over-torque and improves conductivity; zinc-plated stud resists corrosion
- Polarity-specific for exact fit; oversize polarity signs molded in

DESCRIPTION	SIZE	MATERIAL	RETAIL PACK	PACK SIZE	BULK PACK	PACK SIZE
Top Post to Side Terminal	3/8"	Lead; die-cast steel	82-9131	1 pair	84-9131	5 pair
Negative	3/8"				84-9610	5
Positive	3/8"				84-9611	5

TERMINAL CONNECTORS

TOP POST-TO-SIDE



82-9132

- Permits side terminal cable connection to top terminal battery
- Polarity-specific for exact fit on posts; polarity signs molded in
- Lead construction – zinc plated hardware resists corrosion

DESCRIPTION	SIZE	MATERIAL	RETAIL PACK	PACK SIZE
Top Post to Side Terminal	3/8"	Lead; zinc-plated steel fasteners	82-9132	1 pair

PROTECTIVE WASHERS



84-9624

- Extends the life of the battery, connectors and hardware
- Easy to assemble

DESCRIPTION	PACK SIZE	PART #
Top Post Terminal	2	82-9623
Top Post Terminal	100	84-9624

FASTENER HARDWARE

- Complete selection of standard and heavy-duty battery-related hardware
- Meets OEM and SAE specifications



DESCRIPTION	SIZE	MATERIAL	RETAIL PACK	PACK SIZE	BULK PACK	PACK SIZE
Bolt, square head & nut	5/16" - 18 x 1 3/8"	Steel; zinc-plated	82-9183	2	84-9183	25
Bolt, square head & shoulder nut	5/16" - 18 x 1 3/8"	Steel; tin-plated	—	—	84-9289	25
Nut, closed cap for Group 31	3/8" - 16	Stainless Steel	82-9184	1	84-9184	25
Nut, flange	3/8" - 16	Steel; zinc-plated	—	—	84-9445	10
Bolt, side terminal; single power lead	3/8" - 16 x 13/32"	Steel; zinc-plated	82-9216	2	84-9216	25
Bolt, side terminal; dual power lead	3/8" - 16 x 1"	Steel; zinc-plated	82-9217	2	84-9217	25
Shim, battery post		Lead	—	—	84-9593	25
Spacer, for dual power lead, side terminal bolt		Lead	—	—	84-9612	10

ACCESSORY ADAPTER NUTS

- Connects power accessories directly to battery
- Fits standard battery bolt
- For post-terminal applications



DESCRIPTION	SIZE	MATERIAL	PACK SIZE	BULK PACK	PACK SIZE
Top terminal accessory post	5/16" - 18 x 9/16"	Brass; zinc-plated steel fasteners	1	84-9185	5
Side terminal extension bolt	3/8" - 16 x 13/32"	Brass; zinc plated fasteners		84-9599	5

POST-TERMINAL BRUSH

- Corrosion-resistant self-contained brush set
- Inner bristles clean post terminals
- Conical outer bristles clean cable connectors

PART #	PACK SIZE
84-9186	1



84-9186

BOOSTER CLAMPS – REPLACEMENT



- Jaws grip battery posts, studs & side terminals
- Insulated grips in both black & red
- For 1-3/0 gauges
- 3 coil spring, over 50 lbs of clamping pressure
- Solid copper clamps weigh over 3/4 lb.
- 5/16" – 18 nut & bolt included

RATING	JAW TYPE	DESCRIPTION	GRIP COLOR	PACK	PART #
400 AMP	Standard Jaws	Commercial grade	Red & Black	Pair	84-9280
500 AMP	Parrot Jaws	Industrial grade	Red & Black	Pair	84-9281
900 AMP	Parrot Jaws	Industrial grade	Red	1	84-9321
900 AMP	Parrot Jaws	Industrial grade	Black	1	84-9322
900 AMP	Parrot Jaws	Industrial grade	Red & Black	Pair	84-9630

BATTERY CABLE CONNECTORS

PLUG-IN STYLE



- Color coded ends help identify different voltages and will prevent mismatching power supply to the electrical output
- Comes complete with 1 housing and 2 contact terminals
- Housings mate together with the same color plug and receptacle – simply rotate connector 180° and plug similar part numbers together
- Available in 50, 175 and 350 AMP ratings for use up to 600 volt AC or DC

RATING	TYPE	GAUGE	COLOR	PACK	PART #
50 AMP	Plug-In End	12-10	Red	1	84-9680
50 AMP	Plug-In End	12-10	Grey	1	84-9627
50 AMP	Plug-In End	6	Red	1	84-9626
50 AMP	Plug-In End	6	Grey	1	84-9631
175 AMP	Plug-In End	4	Red	1	84-9681
175 AMP	Plug-In End	4	Blue	1	84-9551
175 AMP	Plug-In End	4	Grey	1	84-9632
175 AMP	Plug-In End	2	Red	1	84-9682
175 AMP	Plug-In End	2	Blue	1	84-9487
175 AMP	Plug-In End	2	Grey	1	84-9633
175 AMP	Plug-In End	1/0	Red	1	84-9628
175 AMP	Plug-In End	1/0	Blue	1	84-9683
175 AMP	Plug-In End	1/0	Grey	1	84-9634
350 AMP	Plug-In End	2/0	Red	1	84-9482
350 AMP	Plug-In End	2/0	Blue	1	84-9684
350 AMP	Plug-In End	2/0	Grey	1	84-9485

BATTERY CABLE CONNECTORS

PROTECTIVE CAPS – PLUG-IN STYLE



- Black protective caps cover the connector from weather and chemicals when not in use
- Available in three sizes

RATING	TYPE	DESCRIPTION	GRIP COLOR	PACK	PART #
50 AMP	Plug-In End	Fits 50 AMP housings	Black	1	84-9621
175 AMP	Plug-In End	Fits 175 AMP housing	Black	1	84-9456
350 AMP	Plug-In End	Fits 350 AMP housings	Black	1	84-9622

- Jaws accommodate up to 3/4"
- Excellent for test equipment
- Use for OEM repair and custom build
- Color-coded vinyl boots

RATING	JAW TYPE	DESCRIPTION	GRIP COLOR	RETAIL PACK	PACK
75 AMP	Clamp style	Industrial grade	Red	84-4997	1
75 AMP	Clamp style	Industrial grade	Black	84-4998	1
75 AMP	Clamp style	Industrial grade	Red & Black	84-4999	Pair
50 AMP	Clamp style	Industrial grade	Red	84-5002	1
50 AMP	Clamp style	Industrial grade	Black	84-5003	1
50 AMP	Clamp style	Industrial grade	Red & Black	84-5000	Pair

HEAVY DUTY CHARGING CLIPS



- For test/charge applications
- Jaws accommodate up to 3/4"

RATING	JAW TYPE	JAW SPREAD	RETAIL PACK	PART #	BULK PACK	PACK
10 AMP	Standard Jaw	7/16"	2	82-9540	84-9540	25
25 AMP	Standard Jaw	3/4"	2	82-9543	84-9543	25
50 AMP	Standard Jaw	1"	2	82-9544	84-9544	25

TEST CLIPS



ALLIGATOR CLIPS & TEST LEADS

- Jaws accommodate up to 5/16"

DESCRIPTION	INSULATED	COLOR	PART #	PACK
Test Lead, 10', 18 GA	Yes	Red	84-9615	1
Test Lead, 10', 18 GA	Yes	Black	84-9616	1
Test Lead, 2 1/2', 16 GA	Yes	Red & Black	84-9613	1 Pair
Alligator Clip	No	Red	84-5005	1
Alligator Clip	No	Black	84-5004	1



ALLIGATOR CLIP BOOTS

DESCRIPTION	COLOR	RETAIL PACK	PACK SIZE	BULK PACK	PACK
Protective boots for Alligator Clips	Red & Black	82-9614	1 Pair	84-9614	5 Pair



BOOSTER CABLES



84-9550

- Cable construction of 100% fine-stranded copper conductors
- Tangle-free design remains flexible even in cold weather
- 1 & 2 Gauge includes Thermoplastic Elastomer (TPE) jacketing
- 4, 6 & 8 Gauge includes Polyvinyl chloride (PVC) jacketing
- All booster cables are supplied in a retail storage box
- Additional gauges and lengths available as special order
- 175A plug in ends for 84-9279 and 84-9496

LIGHT DUTY

GAUGE	JAW TYPE	JAW RATING	LENGTH	CABLE COLOR	JACKET	PART #
8 GA	Standard Jaws	200 AMP	12'	Yellow & Black	PVC	84-9550

MEDIUM DUTY – COMMERCIAL GRADE

GAUGE	JAW TYPE	JAW RATING	LENGTH	CABLE COLOR	JACKET	PART #
6 GA	Standard Jaws	500 AMP	16'	Orange & Black	PVC	84-9472
4 GA	Standard Jaws	500 AMP	16'	White & Black	PVC	84-9331
4 GA	Standard Jaws	500 AMP	20'	White & Black	PVC	84-9276
4 GA	Parrot Jaws	600 AMP	20'	White & Black	PVC	84-9277

MEDIUM DUTY, PLUG IN CONNECTOR – COMMERCIAL GRADE

GAUGE	JAW TYPE	JAW RATING	LENGTH	CABLE COLOR	JACKET	PART #
4 GA	Std. Jaws & Plug-In	500 AMP	20'	White & Black	PVC	84-9279
4 GA	Plug-In w/ 3/8" lugs	175 AMP	5'	White & Black	PVC	84-9496

HEAVY DUTY – INDUSTRIAL GRADE

GAUGE	JAW TYPE	JAW RATING	LENGTH	CABLE COLOR	JACKET	PART #
2 GA	Parrot Jaws	600 AMP	20'	Red & Black	TPE	84-9278
1 GA	Standard Jaws	500 AMP	12'	Grey & Black	TPE	84-9484
1 GA	Standard Jaws	500 AMP	16'	Red & Black	TPE	84-9477
1 GA	Standard Jaws	500 AMP	20'	Grey & Black	TPE	84-9476
1 GA	Parrot Jaws	900 AMP	25'	Grey & Black	TPE	84-9567

BOOSTER CABLE

TWIN CONDUCTOR



- Make up your own booster cables
- Combine with heavy duty clamps for superior charging power
- Can be used with SB type connectors for plug in convenience
- Ideal for tarps system (dump truck / dump trailer)
- Insulation stays flexible in cold weather; bonded cable resists tangling
- 100% fine-stranded copper meets SAE J1127 specifications
- Temperature rated to -40°F (-40°C); rated @ 60V or less

GAUGE	OUTSIDE DIAMETER	COLOR	LENGTH	PART #
8 GA	.320" x .700"	Black & Yellow	1,500'	82-5759-1500
6 GA	.360" x .780"	Black & Orange	100'	82-5760
6 GA	.360" x .780"	Black & Orange	1,200'	82-5760-1200
4 GA	.410" x .880"	Black & White	100'	82-5761
4 GA	.410" x .880"	Black & White	500'	82-5761-500
2 GA	.450" x .960"	Black & Red	100'	82-5762

- Designed for lift gate applications and as an alternative power source
- Solid brass pin terminals for best conductivity
- 2, 1/2" mounting holes; stainless steel spring
- Terminals accepts 4 gauge cable
- 200 AMP heavy die-cast construction

SOCKET

PART #	SOCKET #	DESCRIPTION	MATERIAL
82-1041	2	Socket – Dual Pole	Zinc Die-Cast
82-0851	1	Socket – Single Pole	Zinc Die-Cast
82-2144		Socket Boot	Rubber

PLUG

PART #	PLUG #	DESCRIPTION	MATERIAL
82-1042	2	Plug & Guard Spring – Dual Pole	Zinc Die-Cast
82-0852	1	Plug & Guard Spring – Single Pole	Zinc Die-Cast

PLUG & SOCKET COMBO

PART #	PLUG/SOCKET#	DESCRIPTION	MATERIAL
82-0950	1	Plug & Socket – Single Pole	Zinc Die-Cast

LIFT GATE – CHARGING PLUGS & SOCKETS



82-1041



82-0851



82-2144



82-1042



82-0852

VERTICAL PIN

DUMP TRUCK & TARP TRAILER PLUGS & SOCKETS

- Designed for dump truck, tarp and grain trailer applications; also alternative power source
- Solid brass pin terminals for best conductivity
- 2, 1/2" mounting holes; stainless steel spring
- Terminals accepts 4 gauge cable(s)
- 200 AMP heavy die-cast construction
- Vertical pin plug/socket = set screw termination

SOCKET

PART #	SOCKET #	DESCRIPTION	MATERIAL
82-1041V	2	Socket – Dual Pole	Zinc Die-Cast
82-2144		Socket Boot	Rubber

PLUG

PART #	PLUG #	DESCRIPTION	MATERIAL
82-1042V	2	Plug & Guard Spring – Dual Pole	Zinc Die-Cast



82-1041V



82-2144

82-1042V

MOLDED BATTERY HARNESSSES

"BEST"



- 100% fine stranded copper conductor
- 2/0 GA, PVC jacketed starter cable
- Meets SAE J1127 specifications
- Designed to connect 2, 3 or 4 batteries
- Red and Black (+/-) option for easy polarity identification
- Protective caps protect contacts and prevent corrosion
- Precision molded provide a maintenance free seal

CENTRE TO CENTRE DIMENSION	POLARITY	PACK SIZE	PART #
7"	Negative	1	84-9582
7"	Positive	1	84-9583
14"	Negative	1	84-9584
14"	Positive	1	84-9585
21"	Negative	1	84-9586
21"	Positive	1	84-9587

QUICKLINK® STUD BATTERY HARNESSSES

"BETTER"



- 100% fine stranded copper conductor
- 2/0 GA, welding cable provides extreme flexibility in colder temperatures
- Includes high-end locking, anti-rotational lug ends to ensure a tight fit and a superior connection
- Ideal for truck, farm, construction and automotive applications

CENTRE TO CENTRE DIMENSION	POLARITY	TYPICAL BATTERY LAYOUT	PACK SIZE	PART #
8 1/2"	Negative	Side-By-Side	1	84-9304
8 1/2"	Positive	Side-By-Side	1	84-9305
12"	Negative	Side-By-Side	1	84-9420
12"	Positive	Side-By-Side	1	84-9421
17"	Negative	End-To-End	1	84-9306
17"	Positive	End-To-End	1	84-9307

TIN PLATED STUD BATTERY HARNESSSES

"GOOD"



- 100% fine stranded copper conductor
- 2/0 GA, welding cable provides extreme flexibility in colder temperatures
- Tin plated copper tube lug connections

CENTRE TO CENTRE DIMENSION	POLARITY	TYPICAL BATTERY LAYOUT	PACK SIZE	PART #
8 1/2"	Negative	Side-by-Side	1	84-9690
8 1/2"	Positive	Side-by-Side	1	84-9691
12"	Negative	Side-by-Side	1	84-9692
12"	Positive	Side-by-Side	1	84-9693
17"	Negative	End-to-End	1	84-9694
17"	Positive	End-to-End	1	84-9695

STUD BATTERIES

STUD BATTERIES – LUG TO LUG – BATTERY TO GROUND OR STARTER

CENTRE TO CENTRE DIMENSION	DESCRIPTION	GAUGE	PACK SIZE	PART #
10"	Lug to Lug, 3/8"- 3/8"	2/0 GA	1	84-9467
15"	Lug to Lug, 3/8"- 3/8"	2/0 GA	1	84-9470
20"	Lug to Lug, 3/8"- 3/8"	2/0 GA	1	84-9473



TOP POST-TO-POWER TAKE OFF POST

CENTRE TO CENTRE DIMENSION	POLARITY	GAUGE	PACK SIZE	PART #
13 5/8"	Negative	2/0 GA	1	84-9274
13 5/8"	Positive	2/0 GA	1	84-9275



BATTERY JUMPERS

- Designed for connection of 2 batteries to achieve additional voltage
- Premium quality synthetic rubber insulated copper welding cable enables easy routing & cold weather flexibility

CENTRE TO CENTRE DIMENSION	DESCRIPTION	GAUGE	PACK SIZE	PART #
12"	Offset	1 GA	1	84-9402
8"	Offset	1 GA	1	84-9401
8"	Offset	2/0 GA	1	84-9403



SOLDER SLUGS AND FLUX

- Pre-measured solder slugs for quick and easy battery cable soldering
- Improves your electrical connection by filling in any contact irregularities
- Color coded to industry standards, gauges 6 through 4/0
- Melting temperature rating 182°C (361°F)

CABLE GAUGE	COLOR CODE	PACK SIZE	PART #
6	Grey	25	84-9600
4	Grey	25	84-9601
2	Green	25	84-9602
1	Pink	25	84-9603
1/0	Black	25	84-9604
2/0	Orange	25	84-9605
3/0	Purple	25	84-9606
4/0	Yellow	25	84-9607
Solder Flux	Clear	2oz.	84-9608



Visit page 169 for more information on our 48-piece Battery Terminal Solder Slug Kit

READY-TO-INSTALL BATTERY CABLES


TOP POST CABLES



- Meet or exceed SAE specifications; ideal for OEM replacement
- 100% fine stranded copper wire with black or red PVC insulation
- Tinning of copper wire before casting ensures perfect bond between the wire and connector
- Antimonial lead connectors resist corrosion; die-cast process seals copper wires from acid fumes and corrosive salts
- Universal polarity top post connector
- Excellent for light duty trucks, vans, and recreational vehicles (R.V.)
- Industry standard 3/8" stud hole
- Individually packed



CENTRE TO CENTRE	BLACK 4 GAUGE PART #	BLACK 4 GAUGE W/LEAD	BLACK 1 GAUGE PART #	RED 4 GAUGE PART #	RED 4 GAUGE W/LEAD	RED 1 GAUGE PART #
9"	84-9224					
12"	84-9225	84-9371	84-9241	84-9225-R	84-9371-R	
14"	82-7014					
15"	84-9226	84-9361		84-9226-R	84-9361-R	
16"	84-9227		84-9242			84-9242-R
19"	84-9230		84-9243	84-9230-R		
21"			84-9503			84-9503-R
22"	84-9228			84-9228-R		
24"	84-9231					
25"	82-7025	84-9372		82-7025-R	84-9372-R	
27"	84-9232		84-9244			84-9244-R
30"	84-9233		84-9245	84-9233-R		84-9245-R
32"	84-9234	84-9373		84-9234-R	84-9373-R	
36"	84-9229	84-9365	84-9246	84-9229-R	84-9365-R	84-9571
37"	84-9235					
41"			84-9247			
42"	84-9236			84-9236-R		
48"	84-9237	84-9367	84-9248	84-9237-R	84-9367-R	84-9572
53"	82-7053					
56"		84-9374			84-9374-R	
60"	84-9238			84-9238-R		
65"			84-9510			84-9510-R
72"	82-7072	84-9375		84-9375-R	84-9500-R	

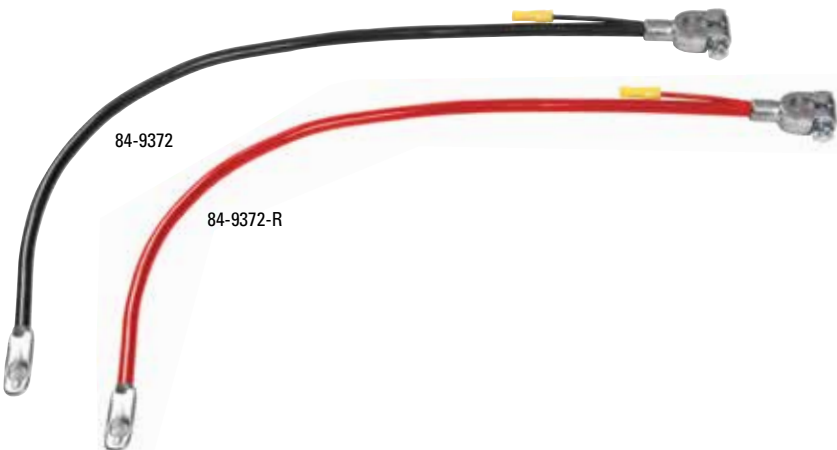

SIDE TERMINAL CABLES

READY-TO-INSTALL BATTERY CABLES

- 3/8"- 16 x 13/32" bolts, 1/2" hex head bolt

CENTRE TO CENTRE	PACK SIZE	BLACK 4 GAUGE PART #	RED 4 GAUGE W/LEAD PART #
15"	1	84-9249	84-9249-R
25"	1	84-9250	84-9250-R
35"	1	84-9251	84-9251-R
45"	1	84-9252	84-9252-R
55"	1	84-9253	84-9253-R
65"	1	84-9254	84-9254-R



SWITCH-TO-STARTER CABLES

READY-TO-INSTALL BATTERY CABLES


CENTRE TO CENTRE	PACK SIZE	BLACK 4 GAUGE PART #	BLACK 1 GAUGE PART #	RED 4 GAUGE PART #
10"	1	84-9255	84-9505	84-9255-R
15"	1	84-9256	84-9262	84-9256-R
18"	1	84-9257	84-9382	84-9257-R
19"	1		84-9388	
24"	1	84-9258	84-9506	84-9258-R
25"	1		84-9263	
30"	1	84-9504		84-9504-R
33"	1	84-9259		
35"	1		84-9264	
36"	1	84-9260		84-9260-R
40"	1	84-9261		84-9261-R
46"	1		84-9376	
49"	1	84-9377		84-9377-R



READY-TO-INSTALL BRAIDED GROUND STRAP

- 3/8" Clamp-to-Lug or Lug-to-Lug styles
- Light to medium duty, marine and automotive applications
- Corrosion-resistant tin plating

CENTRE TO CENTRE DIMENSION	DESCRIPTION	PACK SIZE	4 GAUGE PART #	2 GAUGE PART #
9"	Clamp to Lug	1		84-9239
9"	Lug to Lug	1	84-9577	
13"	Clamp to Lug	1		84-9240
13"	Lug to Lug	1	84-9559	
18"	Lug to Lug	1	84-9465	
24"	Clamp to Lug	1		84-9464
24"	Lug to Lug	1	84-9576	

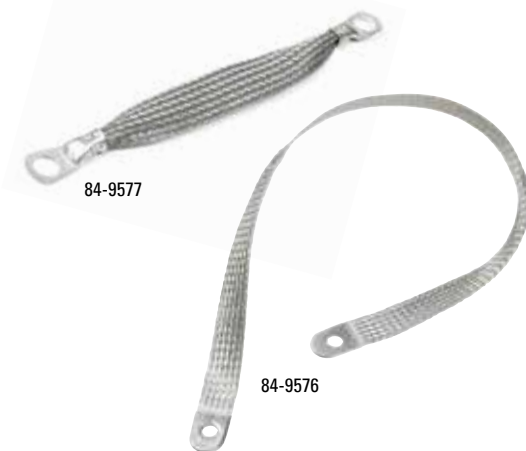

MASTER BATTERY DISCONNECT SWITCH



- Truck, Automotive, Marine, Off-Road and R.V. applications
- For battery circuit (82-2103, 82-2233); for alternator or generator field circuit (82-2155)
- 3/4" & #10-32 copper alloy stud terminals with hex nuts, lock washers included
- Large die cast lever for ease of operation; mounting stem 1/2" long x 3/4" dia.
- Fits panel up to 1/4" thick; 10,000 life cycle; 6-36V DC
- Includes faceplate
- Faceplate replacement for 82-2103 (82-2157)

DISCONNECTS ALL CIRCUITRY TO REDUCE THE POSSIBILITY OF THEFT / ACCIDENTAL ELECTRICAL FIRES

PRODUCT RATING

Continuous Rating (Make/Break), Large Studs – 180 AMP @ 6-36V DC; 1,000 AMP – in rush (82-2103)

Continuous Rating (Make/Break), Large Studs – 180 AMP @ 6-36V DC (82-2233)

Intermittent Rating (Carrying), Large Studs – 1800 AMP @12V DC; 1 cycle = 4 seconds on/20 minutes off)

PART #	POSITION	RATED	TYPE	TERMINATION	DIMENSIONS
82-2103	Off/On	12V	S.P.S.T.	2, 3/8" stud terminals ground w/ faceplate	4 3/8" L x 2 5/8" Dia.
82-2233	Off/On	12V	S.P.S.T.	2, 1/2" stud terminals ground w/ faceplate	4 3/8" L x 2 5/8" Dia.



DESIGNED TO BREAK ALTERNATOR GENERATOR CIRCUIT PRIOR TO BATTERY CIRCUIT DISCONNECT

PRODUCT RATING

Continuous Rating (Make/Break), Large Studs: 180 AMP, Small Studs: 20 AMP @ 6-36V DC

Intermittent Rating (Carrying), Large Studs: 1,000 AMPs (20 sec. "On" – 5 Minutes "Off")

PART #	POSITION	RATED	TYPE	TERMINATION	DIMENSIONS
82-2155	Off/On	12V	D.P.S.T.	4 stud terminal ground	4 1/8" L x 2 5/8" Dia.

BATTERY ISOLATOR SWITCH



- Prevents unauthorized use
- Eliminates battery discharge
- Waterproof body with removable key and protective cap
- Rated at 500 AMPs at 12V
- Stud Size: M10 (1.5mm)

82-2104

- Protects alternator and electrical system from shorts
- Reduces the risks of battery explosion caused by sparks
- High temperature PVC construction rated at 90°C (190°F)
- Color-coded for easy polarity identification
- Conforms to SAE J1128 dielectric specifications, meets USCG requirements

STRAIGHT CLAMP

FITS GAUGES	COLOR	PACK	PART #
1 & 2	Black	5	84-9140
1 & 2	Red	5	84-9141
1/0 & 2/0	Black	5	84-9142
1/0 & 2/0	Red	5	84-9143

STRAIGHT CLAMP SNAP ON FEATURE

FITS GAUGES	COLOR	PACK	PART #
6 & 4	Black	5	84-9138
6 & 4	Red	5	84-9139
1 & 2	Black	5	84-9136
1 & 2	Red	5	84-9137


AUTOMOTIVE LUG

FITS GAUGES	COLOR	PACK	PART #
1 & 2	Black	5	84-9150
1 & 2	Red	5	84-9151
1/0 - 2/0	Black	5	84-9152
1/0 - 2/0	Red	5	84-9153

TAB INSULATOR

FITS GAUGES	TERMINAL O.D.	COLOR	PACK	PART #
8-2	0.73"	Red	5	84-9323
8-2	0.73"	Black	5	84-9324
2-2/0	1.03"	Red	5	84-9327
2-2/0	1.03"	Black	5	84-9328
3/0-4/0	1.37"	Red	5	84-9325
3/0-4/0	1.37"	Black	5	84-9326

BATTERY TERMINAL PROTECTORS

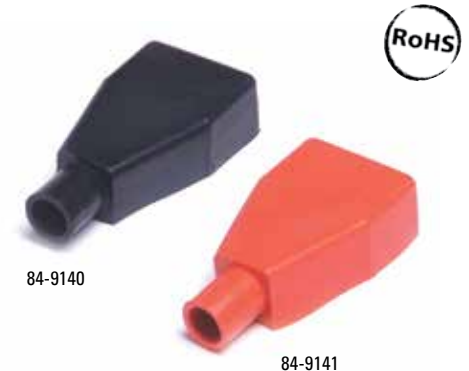

BRUTE™ HAMMER CRIMPER



84-9087

- Inexpensive, simple crimping tool
- Use with hammer or vise
- Crimps 8- 4/0 gauge connectors
- Spring loaded pin locks in "up" position for loading connector and cable
- Pin is then released to hold connector securely during crimping
- 6 month limited warranty

CONNECTOR CABLE RANGE	PART #
8-4/0 GA	84-9087

CUB™ CRIMPER



84-9080

- Light-medium duty applications
- Adjustable crimp dies crimp all major lugs, connectors and splices
- Insulated grips
- One year limited warranty

OVERALL LENGTH	CONNECTOR CABLE RANGE	PART #
15"	8-1 GA	84-9080

HEXCRIMP™



84-9082

84-9085

- Medium to heavy duty applications
- Properly crimps copper, tin-plated, die cast and Magna lug splices and connectors
- Adjustable dies can crimp 8 to 250 MCM cable range
- 26" long with insulated handles for comfort
- 2 year limited warranty
- Made in North America



PART #	DESCRIPTION
84-9082	Hand Held
84-9085	Bench Mount
84-9084	Replacement Dies & Hardware (for 84-9082)

ROTARY CABLE SLITTER/STRIPPER TOOL

HEAVY DUTY



83-6515

- Slits & strips round battery & trailer cables
- Can strip 8 to 4/0 GA wire, battery and trailer cables
- Self-adjusting cutting depth
- Makes a clean strip without damaging wire strands
- Blade swivels for longitudinal/spiral cuts
- Ergonomic design



PART #	DESCRIPTION
83-6515	Heavy Duty Rotary Cable Slitter / Stripper Tool

9" CABLE CUTTER

- Cuts cable up to 2/0 gauge
- Fits any toolbox
- Forged steel with insulated grips
- 6 month limited warranty



84-9088

OVERALL LENGTH	CONNECTOR CABLE RANGE	PART #
9"	up to 2/0 GA	84-9088

22" CABLE CUTTER

- Cuts cables 22 GA to 250 mcm (6/0 GA)
- 22" handle for easy cutting
- 1075 Carbon steel blade, hardened for long life; can be sharpened
- 6 month limited warranty
- Made in North America

PART #	DESCRIPTION
84-9089	Hand Held
84-9090	Bench Mount



84-9089



84-9090

FIELD REPAIR KIT WITH HEXCRIMP™

- Contains components (except cable) needed to build or repair 2/0 battery cables
- The carrying case is made of steel, finished in corrosion resistant baked grey enamel

PART #	DESCRIPTION	RE-ORDER PART #
84-9290	Field Repair Kit- Includes:	
	1 HexCrimp™ Tool – 8 gauge - 250 mcm	84-9082
	1 9" Cutter – up to 2/0 cables	84-9088
	5 2/0 straight clamp – positive	84-9059
	5 2/0 straight clamp – negative	84-9058
	2 2/0 flag clamp – positive	84-9098
	2 2/0 flag clamp – negative	84-9097
	5 2/0 starter/ground lug – 3/8" hole	84-9110
	5 2/0 starter/ground lug – 1/2" hole	84-9111
	5 Terminal Protector straight – black	84-9142
	5 Terminal Protector straight – red	84-9143
	2 Terminal Protector flag – black	84-9144
	2 Terminal Protector flag – red	84-9145
	2 3/4" Heat shrink tubing 6" – Black 3:1	84-4003
	2 3/4" Heat shrink tubing 6" – Red 3:1	84-6103



84-9290

BATTERY BOXES

BATTERY BOXES FOR 6-VOLT, GC2 AND 4D BATTERIES

Growing demand for more power and deeper cycles has led to wider use of GC2 and 4D batteries in recreational vehicles, boats, and small alternative energy applications. Our Battery Box line allows you to set up the configuration that works best for your installation, whether it is single batteries, or dual batteries side by side or end-to-end.

Larger boxes use thumb screws to retain the covers and have foot pads to allow mounting options in low clearance environments like sailboats and campers.



Construction



Marine



RV

SINGLE & DUAL

- Rugged heavy wall polyethylene construction
- Impervious to acid, gasoline, oil and solvents
- Flame retardant
- Cold temperature impact resistant to -30°F (-34°C)
- Heat stable -30°F to +200°F (-34°C to +93°C)
- Single box holds ONE 6-Volt battery
- Dual box holds TWO 6-Volt batteries
- Depending on your space requirements, use two boxes side-by-side, end-to-end or use a dual box
- Dual box is molded in black

PART #	GROUP SIZE	TYPICAL BATTERIES IN ARRAY	BOX COLOR	INSIDE DIMENSIONS			OUTSIDE DIMENSIONS			MOUNTING BRACKET
				LENGTH	WIDTH	HEIGHT	LENGTH	WIDTH	HEIGHT	
84-9660	6-Volt/GC2	1	Black	10-3/4" (27.3 cm)	7-1/4" (18.4 cm)	12-1/4" (31.1 cm)	13-1/2" (34.3 cm)	9-1/4" (23.5 cm)	13" (33 cm)	-
SIDE BY SIDE										
84-9661	Dual 6-Volt/GC2	2	Black	15" (38.1 cm)	11" (27.9 cm)	13" (33 cm)	20" (50.8 cm)	14-1/2" (36.8 cm)	14-1/2" (36.8 cm)	(2 Included)
END TO END										
84-9425	Dual 6-Volt Single 4D GC2	2	Black	21-5/8" (55 cm)	9-1/2" (24.1 cm)	11-1/2" (29.2 cm)	26-3/4" (68 cm)	14" (35.6 cm)	12-3/4" (32.4 cm)	(2 Included)



Single 6-Volt
84-9660



Dual 6-Volt side-by-side, black
84-9661



Dual 6-Volt end-to-end
84-9425

BATTERY BOXES

COMMERCIAL MARINE, RECREATIONAL VEHICLES, CONSTRUCTION MACHINERY, LARGER OFF-GRID, BACKUP POWER SYSTEMS

Big power requirements mean big batteries and big battery boxes. Our commercial boxes are used for 4D, 8D and other large arrays. These boxes traditionally have secured batteries on working boats and heavy construction equipment and now are found in larger residential and small commercial off-grid power systems.

With mounting options to accommodate a variety of installations, venting options and cable routing options including conduit mounting, these battery boxes have been carefully engineered to solve your battery security issues.



Construction



Heavy Duty



Marine

COMMERCIAL BOXES

- Rugged, durable, heavy wall construction
- Impervious to acid, gasoline, oil and solvents
- Heat stable to +200°F (+93°C)
- Cold temperature impact resistant to -30°F (-34°C)
- Flame retardant
- UV stabilized (Rating 6)
- 3-4 way cable channels molded into design
- Large entry ports for heavy duty cable
- Cover held firmly with convenient thumb screws, no special tools required
- Cover can be locked for protection and tamper resistance
- Vent holes in cover allow gases to escape, preventing dangerous hydrogen build up
- Accommodates variety of mounting options

PART #	TYPICAL GROUP SIZE	TYPICAL BATTERIES IN ARRAY	COLOR	INSIDE DIMENSIONS			OUTSIDE DIMENSIONS			MOUNTING BRACKET
				LENGTH	WIDTH	HEIGHT	LENGTH	WIDTH	HEIGHT	
84-9425	4D	1	Black	21-5/8" (55 cm)	9-1/2" (24.1 cm)	11-1/2" (29.2 cm)	26-3/4" (68 cm)	14" (35.6 cm)	12-3/4" (32.4 cm)	(2 Included)
84-9426	8D High	1	Black	21-5/8" (55 cm)	11-3/4" (29.8 cm)	13" (33 cm)	26-3/4" (68 cm)	16-1/2" (41.9 cm)	14" (35.6 cm)	(2 Included)
84-9664	Dual 8D End-to-End	2	Black	42-1/2" (108 cm)	12" (30.5 cm)	10-3/4" (27.3 cm)	49-1/2" (125.7 cm)	18-1/4" (46.4 cm)	12-1/4" (31.1 cm)	(Optional)
84-9665	Dual 8D Side-by-Side	2	Black	21-1/2" (54.6 cm)	23-1/2" (59.7 cm)	10-3/4" (27.3 cm)	27" (68.6 cm)	29" (73.7 cm)	12-1/4" (31.1 cm)	(2 Included)



4D
84-9425



8D high
84-9426



Dual 8D end-to-end
84-9664



Dual 8D side-by-side
84-9665

BATTERY BOXES



Mounting holes



Strap in use

AUTO, LIGHT TRUCK, MARINE & RV

Trilingual safety warning in English, French and Spanish



Vent holes allow gases to escape, preventing dangerous hydrogen build up

Cover

Larger wider cable ports for easy cable access



Heavy duty tie down strap kit is included with each box.

FITS ALL BATTERIES

- Fits all traditional battery group sizes
- Fits all new orbital or spiral celled, deep cycle, high performance batteries

NEW COVER

- Easy-on and easy-off
- Safe and secure
- Convenient, fast, durable

NEW MOUNTING HOLES IN HANDLE

- Use hold-down holes molded in to reinforced handles
- Use J-hooks, L-hooks, threaded rod or lag bolts
- Remove the lid while keeping the box secure

NEW TOUGHER MATERIAL

- Impact resistant to -30°F (-34°C)
- Heat stable to +200°F (+93°C)
- Meets U.S. Coast Guard Regulations 183.420 & ABYCE-10.7
- Impervious to acid, gasoline, oil and solvents
- Will not rust, UV protected

PART #	GROUP SIZE	INSIDE DIMENSIONS			OUTSIDE DIMENSIONS		
		LENGTH	WIDTH	HEIGHT	LENGTH	WIDTH	HEIGHT
84-9662	U1 Black	8" (20.3 cm)	5-1/4" (13.3 cm)	7-15/16" (20.1 cm)	10-3/4" (27.9 cm)	7-1/2" (19.1 cm)	8-1/2" (21.6 cm)
84-9424	24 Black	10-1/2" (26.7 cm)	7" (17.8 cm)	9-3/4" (24.8 cm)	13-1/2" (34.3 cm)	9-1/4" (23.5 cm)	10-1/4" (26 cm)
84-9427	27 Black	12-3/4" (32.4 cm)	7-1/4" (18.4 cm)	10" (25.4 cm)	16-1/8" (40.9 cm)	9-5/8" (24.4 cm)	10-7/8" (27.6 cm)
84-9423	Adjustable 24, 27, 31 Black	14-1/2" (36.8 cm)	7-1/4" (18.4 cm)	10-3/8" (26.3 cm)	17-3/4" (45.1 cm)	10-1/4" (26 cm)	10-7/8" (27.6 cm)
84-9422	Dual 27, 31	14-1/2" (36.8 cm)	15-1/2" (39.3 cm)	10-1/4" (26.0 cm)	19-1/4" (48.8 cm)	20" (50.8 cm)	11-7/8" (30.1 cm)



BATTERY HOLD-DOWNS

- New telescoping design
- Fiberglass-reinforced polypropylene is rust and corrosion-proof
- Non-conductive – eliminates hold-down as source of shorts
- Car, truck, bus, off-road, marine and recreational vehicle applications

PART #	DESCRIPTION	MIN/MAX EXTENSION	PACK SIZE
84-9288	Offset hold-down	5 1/2" - 9"	1
84-9320	Flush hold-down	8 5/8" - 14 3/4"	1
84-9480	Adjustable mount crossbar	6 7/8"	1



HOLD DOWN SETS – L & J STYLE

- Long thread accommodates all crossbar/frame designs including QuickHold® products
- "L" and "J" style bend eliminates any need to shift or remove battery
- Sold as pair; hardware included
- Use with battery tray below
- 4", 1/4"-20 thread

PART #	DESCRIPTION	LENGTH	PACK
84-9287	J bolt	8"	Pair
84-9286	J bolt	10"	Pair
84-9685	J bolt	12"	Pair
84-9285	L bolt	10"	Pair



BATTERY TRAYS

BATTERY TRAYS

- Drain slots prevent fluid accumulation
- Ideal replacement for OEM-style trays
- Vinyl coated steel resists corrosion & cold climate cracking
- Also fits group 1, 2, 17, 22, 23, 42, 54, 55, 56, 72 & 74 batteries (84-9481)

PART #	DESCRIPTION	PACK
84-9481	11" for Group 24 size batteries	1
84-9629	GM base mount hold down	1



BATTERY CABLE – TYPE SGR



82-5703



82-6703

- Ideal for use as an interconnection between batteries and a starter or as a ground in a vehicle
- 100% Copper Cable; made in North America
- Ethylene Propylene Diene Monomer Rubber (EPDM) Insulation
- Provides better flexibility than standard PVC starter cable
- Jacket rated at -40°C (-40°F) to 105°C (221°F)
- Meets all SAE code J1127 specifications; rated @ 60V
- All battery cable is spooled



6 GAUGE

COLOR	25'	50'	100'
Black	82-5722	82-5725	82-5726
Red	82-6722	82-6725	82-6726

4 GAUGE

COLOR	25'	50'	100'
Black	82-5714	82-5713	82-5712
Red	82-6717	82-6713	82-6712

2 GAUGE

COLOR	25'	50'	100'
Black	82-5711	82-5710	82-5709
Red	82-6718	82-6710	82-6709

1 GAUGE

COLOR	25'	50'	100'
Black	82-5708	82-5707	82-5706
Red	82-6719	82-6707	82-6706

1/0 GAUGE

COLOR	25'	50'	100'
Black	82-5705	82-5704	82-5703
Red	82-6720	82-6704	82-6703

2/0 GAUGE

COLOR	25'	50'	100'
Black	82-5702	82-5701	82-5700
Red	82-6721	82-6701	82-6700

3/0 GAUGE

COLOR	25'	50'	100'
Black	82-5723	82-5715	82-5733
Red	82-6723	82-6715	82-6733

4/0 GAUGE

COLOR	25'	50'	100'
Black	82-5743	82-5716	82-5753
Red	82-6743	82-6716	82-6753



EZ-FIND

FOR COMPLETE TECHNICAL SPECS VISIT OUR WEBSITE

- Ideal for use as an interconnection between batteries and a starter or as a ground in a vehicle
- Abrasion, salt and chemical resistant; good flame resistance
- Fine stranded copper conductor; made in North America
- Provides better flexibility than standard PVC starter cable
- Jacket rated at -50°C (-58°F) to 105°C (221°F) – Rated @ 600V
- Meets all SAE J1127 specifications
- All welding cable is spooled



6 GAUGE

COLOR	25'	100'
Black	82-5732	82-5734
Red	82-6732	82-6734

4 GAUGE

COLOR	25'	100'
Black	82-5724	82-5735
Red	82-6727	82-6735

2 GAUGE

COLOR	25'	100'
Black	82-5721	82-5736
Red	82-6728	82-6736

1 GAUGE

COLOR	25'	100'
Black	82-5737	82-5738
Red	82-6746	82-6738

1/0 GAUGE

COLOR	25'	100'
Black	82-5739	82-5740
Red	82-6739	82-6740

2/0 GAUGE

COLOR	25'	100'
Black	82-5730	82-5731
Red	82-6730	82-6731

3/0 GAUGE

COLOR	25'	100'
Black	82-5741	82-5742
Red	82-6741	82-6742

4/0 GAUGE

COLOR	25'	100'
Black	82-5744	82-5745
Red	82-6744	82-6745



82-5730



82-6730



EZ-FIND

FOR COMPLETE TECHNICAL SPECS VISIT OUR WEBSITE