

# e140R LED WORK LAMPS

## FROM GROTE



ALUMINUM  
CONSTRUCTION

12/24V

DUAL  
VOLTAGE



FLOOD  
BEAM PATTERN

OEM

OEM  
SPEC

#### OPTICAL CHARACTERISTICS

Color Temperature (CCT)	5700K
Color Rendering Index (CRI)	70

#### ELECTRICAL CHARACTERISTICS

Operating Voltage Range	9 - 32 V
Operating Temperature Range	-40° C to +50° C
Reverse Polarity Protection	✓
Overheat Protection	✓
ESD, Overvoltage and Transient Protection	✓

#### MECHANICAL CHARACTERISTICS

Materials	Lens: UV-resistant Polycarbonate Housing: Aluminum Powder-Coated
IP Code	IP69
Maximum Storage Temperature	-55° C to +110° C
Impact and shock resistance	50 G
Vibration Resistance	5 G (5 - 500 Hz)

#### APPROVALS AND CERTIFICATES

ISO 7637-2	✓
ISO 10605	✓
ISO 11452	Section 2, 4 and 5
ISO 20653	✓

**GROTE'S e140R LED WORK LAMP FEATURES A HIGH EFFICIENCY DESIGN AND INNOVATIVE HYBRID BEAM PATTERN TO DELIVER A POWERFUL AND VERSATILE EQUIPMENT LIGHTING SOLUTION**



#### FEATURES & BENEFITS

- Thanks to a variable voltage range of 9 to 32 volts, the e140R LED Work Lamp is highly adaptable for different environments
- Meets stringent EMC requirements in accordance with CISPR 25 Class 5
- Constant luminance over the whole operating temperature range
- State-of-the-art TIR-only lens design maximizes optical efficiency
- Rated IP69K, making it pressure-washer safe
- Circuitry protected against automotive transients, DC over- and undervoltage, and ESD
- Unique thermal design improves durability for a lamp that lasts longer

PRODUCT NUMBER	BEAM PATTERN	LUMENS	VOLTAGE	AMPERAGE	MOUNTING TYPE
64Y91	HYBRID	3000	9-32V	3.47 A (12 V); 1.73 A (24 V)	PENDANT



**EZ-FIND**  
SCAN FOR TECH SPECS,  
RELATED PRODUCTS  
AND MORE

**FOR MORE INFORMATION  
VISIT OUR WEBSITE.  
GROTE.COM**

**Grote**

# e140R LED WORK LAMPS FROM GROTE



ALUMINUM  
CONSTRUCTION

12/24V



DUAL  
VOLTAGE





FLOOD  
BEAM PATTERN

OEM

OEM  
SPEC



### HYBRID RANGE - (64Y91)

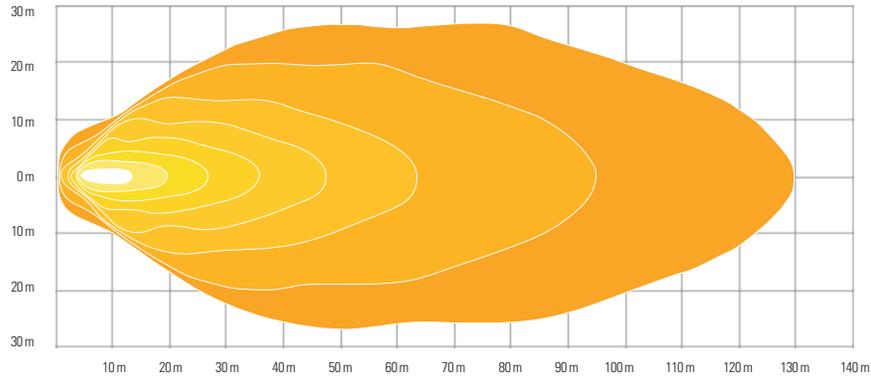

Illuminance (Lux):



**EZ-FIND**  
SCAN FOR TECH SPECS,  
RELATED PRODUCTS  
AND MORE

**FOR MORE INFORMATION  
VISIT OUR WEBSITE.  
GROTE.COM**

