DTP SERIES CONNECTORS
FROM GROTE

CONNECT & PROTECT

ALL WEATHER

DURABLE CONSTRUCTION

IP69K CERTIFIED

25A PER-CONTACT RATING

MAX CURRENT RATING: 25A
MAX VOLTAGE: 250V
WIRE RANGE: 10-14AWG
MATERIALS: THERMOPLASTIC HOUSING, SILICONE SEALS; NICKEL-PLATED CONTACTS
OPERATING TEMPERATURE: -67°F to +257°F (-55°C to +125°C)
INGRESS PROTECTION: IP68/IP69K

ALSO AVAILABLE
DEUTSCH CRIMPING TOOLS



83-6562 14/16/18 GA

83-6564 14/16/18/ 20/24 GA

ECONOMICAL, RATCHETING TOOLS DESIGNED TO CRIMP SOLID BARREL OR OPEN BARREL DEUTSCH TERMINALS




83-6516 12/14/16/ 18/20 GA

OEM TOOL DESIGNED TO CRIMP SOLID BARREL DEUTSCH TERMINALS

RELIABLE POWER STARTS WITH A SECURE CONNECTION

Grote DTP Series Connectors provide a rugged, environmentally sealed solution for high-current applications, delivering up to 25A of reliable performance in demanding environments. Featuring durable thermoplastic housings, high-temperature silicone seals, and secure contact retention, they help protect critical electrical connections from moisture, dust, and vibration. With IP68/IP69K protection, DTP Series Connectors are built for dependable power delivery when it matters most.

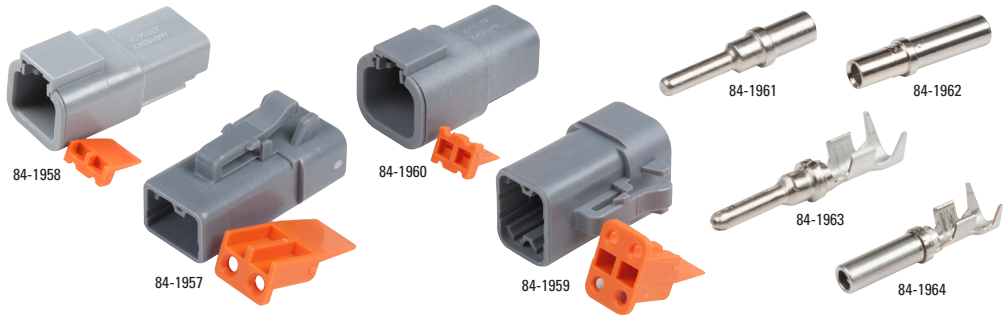

FEATURES & BENEFITS

- Supports up to 25 amps per contact for reliable power delivery to demanding electrical accessories and equipment
- IP68/IP69K-rated sealing protects against moisture, dust, and debris in harsh operating environments
- Withstands vibration up to 20G and shock up to 50G to help maintain secure electrical connections in on- and off-highway applications
- Operates reliably across extreme temperatures from -67°F to +257°F (-55°C to +125°C)
- Available in 2- and 4-position configurations to accommodate diverse wiring and power distribution requirements

PART #	DESCRIPTION
84-1957	DTP, 2-WAY PLUG AND WEDGELOCK, FEMALE, 2 PAIR
84-1958	DTP, 2-WAY RECEPTACLE AND WEDGELOCK, MALE, 2 PAIR
84-1959	DTP, 4-WAY PLUG AND WEDGELOCK, FEMALE, 2 PAIR
84-1960	DTP, 4-WAY RECEPTACLE AND WEDGELOCK, MALE, 2 PAIR
84-1961	DTP, SOLID BARREL, 14-12 GA, MALE, PK 10
84-1962	DTP, SOLID BARREL, 14-12 GA, FEMALE, PK 10
84-1963	DTP, OPEN BARREL, 14-12 GA, MALE, PK 10
84-1964	DTP, OPEN BARREL, 14-12 GA, FEMALE, PK 10

EZ-FIND
SCAN FOR TECH SPECS, RELATED PRODUCTS AND MORE

FOR MORE INFORMATION VISIT OUR WEBSITE. GROTE.COM

Grote®